



**US Army Corps
of Engineers**
Northwestern Division

TECHNICAL REPORT M10

**SEDIMENTATION AND NAVIGATION STUDY OF THE
MISSOURI RIVER,
COPELAND BEND
MILES 569 TO 564.5**

HYDRAULIC MICRO MODEL INVESTIGATION


By
Robert D. Davinroy
David C. Gordon
Aron M. Rhoads
James R. Abbott

**U.S. ARMY CORPS OF ENGINEERS
ST. LOUIS DISTRICT
HYDROLOGIC AND HYDRAULICS BRANCH
APPLIED RIVER ENGINEERING CENTER
FOOT OF ARSENAL STREET
ST. LOUIS, MO 63118**

**Prepared for
U.S. Army Corps of Engineers
Northwestern Division
12565 West Center Road
Omaha, Nebraska 68144-3869**

Final Report - September, 1999

Approved for Public Release; Distribution is Unlimited



REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 1999		3. REPORT TYPE AND DATES COVERED Final Report
4. TITLE AND SUBTITLE SEDIMENTATION AND NAVIGATION STUDY OF THE MISSOURI RIVER, COPELAND BEND, MILES 603 TO 596. HYDRAULIC MICRO MODEL INVESTIGATION			5. FUNDING NUMBERS	
6. AUTHOR(S) Robert Davinroy, David Gordon, Edward Riiff, Aron Rhoads, James Abbott				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers St. Louis District Applied River Engineering Center Foot of Arsenal Street St. Louis, Missouri 63118			8. PERFORMING ORGANIZATION REPORT NUMBER Technical Report M10	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers Northwestern Division 12565 West Center Road Omaha, Nebraska 68144-3869			10. SPONSORING / MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES Available from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for Public Release; Distribution is Unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) A sedimentation and navigation study of the Missouri River at Copeland Bend, between Miles 569 and 564.5, was conducted by the U.S. Army Corps of Engineers, Northwestern Division, Omaha, Nebraska. The study examined the effects of structural modifications to existing dikes upon the navigation channel and also upon lateral erosion. The study was conducted at the Applied River Engineering Center in St. Louis, Missouri. A physical hydraulic micro model was used to evaluate numerous dike modification plans to existing dikes located off the left descending bank of Copeland Bend. Results indicated that most of the proposed modifications to dikes, such as small notches, minimal elevation degradation, addition of chevrons, etc. had little or no negative effect to the integrity of the navigation channel. In addition, tests showed that major modifications made along the left descending bank, such as bankline excavation, could be tolerated as long as the existing dikes were left in place. Flow visualization showed that most tests generated new flowlines along or near the left descending bank, which would be considered an added environmental benefit.				
14. SUBJECT TERMS Missouri River Erosion Sedimentation Copeland Bend Navigation Channel Flow Visualization Notches Dikes Chevrons			15. NUMBER OF PAGES 69	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	

GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and title page. Instructions for filling in each block of the form follow. It is important to **stay within the lines** to meet **optical scanning requirements**.

Block 1. Agency Use Only (Leave blank).

Block 2. Report Date. Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.

Block 3. Type of Report and Dates Covered. State whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 - 30 Jun 88).

Block 4. Title and Subtitle. A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.

Block 5. Funding Numbers. To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract	PR - Project
G - Grant	TA - Task
PE - Program Element	WU - Work Unit Accession No.

Block 6. Author(s). Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).

Block 7. Performing Organization Name(s) and Address(es). Self-explanatory.

Block 8. Performing Organization Report Number. Enter the unique alphanumeric report number(s) assigned by the organization performing the report.

Block 9. Sponsoring/Monitoring Agency Name(s) and Address(es). Self-explanatory.

Block 10. Sponsoring/Monitoring Agency Report Number. (If known)

Block 11. Supplementary Notes. Enter information not included elsewhere such as: Prepared in cooperation with...; Trans. of ...; To be published in.... When a report is revised, include a statement whether the new report supersedes or supplements the older report.

Block 12a. Distribution/Availability Statement. Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. NOFORN, REL, ITAR).

DOD - See DoDD 5230.24, "Distribution Statements on Technical Documents."
DOE - See authorities.
NASA - See Handbook NHB 2200.2.
NTIS - Leave blank.

Block 12b. Distribution Code.

DOD - Leave blank.
DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.
NASA - Leave Blank.
NTIS - Leave Blank.

Block 13. Abstract. Include a brief (*Maximum 200 words*) factual summary of the most significant information contained in the report.

Block 14. Subject Terms. Keywords or phrases identifying major subjects in the report.

Block 15. Number of Pages. Enter the total number of pages.

Block 16. Price Code. Enter appropriate price code (*NTIS only*).

Blocks 17.-19. Security Classifications. Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.

Block 20. Limitation of Abstract. This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.

Technical Report M10

**SEDIMENTATION STUDY OF THE MISSOURI RIVER,
COPELAND BEND
Miles 569 to 564.5**

HYDRAULIC MICRO MODEL INVESTIGATION

By
Robert D. Davinroy
David C. Gordon
Aron M. Rhoads
Edward H. Riiff
James R. Abbott

U.S. ARMY CORPS OF ENGINEERS
ST. LOUIS DISTRICT
HYDROLOGIC AND HYDRAULICS BRANCH
APPLIED RIVER ENGINEERING CENTER
FOOT OF ARSENAL STREET
ST. LOUIS, MO 63118

Prepared for:
U.S. Army Corps of Engineers
Northwestern Division
12565 West Center Road
Omaha, Nebraska 68144-3869

20000721 040

Final Report – September, 1999

DMC QUALITY INSPECTED 4

INTRODUCTION

A sedimentation study of the Missouri River was initiated by the Northwestern Division of the U.S. Army Corps of Engineers. The study was carried out in order to evaluate a number of proposed design alternatives and/or modifications to existing channel navigation and bank stabilization structures in Copeland Bend, between River Miles 567.8 and Mile 565.3.

Personnel involved in the study and overseeing the project included: Mr. Al Swoboda and Mr. John LaRondeau, Northwestern Division, Mr. John Remus and Mr. Dan Pridal, Omaha District, Mr. Michael Bart, Ms. Christine Altendorf, and Ms. Marie Vanderpool, Kansas City District.

The study was conducted between the period November 1998 and March 1999 using a physical hydraulic micro model. The micro model was operated at the St. Louis District Applied River Engineering Center, St. Louis, Missouri. Personnel conducting model testing included Mr. Robert Davinroy, Mr. David Gordon, Mr. Aron Rhoads, Mr. Edward Riiff, and Mr. James Abbott, all of the St. Louis District.

TABLE OF CONTENTS

INTRODUCTION	1
TABLE OF CONTENTS	2
BACKGROUND	3
1. Problem Description	3
2. Field Investigation	4
MICRO MODEL DESCRIPTION	6
1. Scales and Bed Materials	6
2. Apperturences	6
MICRO MODEL TESTS	7
1. Calibration	7
A. Design Hydrograph	8
B. Prototype Surveys	9
2. Base Test	10
3. Design Alternative Tests	11
RESULTS AND CONCLUSIONS	19
1. Summary of Model Tests	19
2. Interpretation of Model Test Results	21
APPENDIX	22

BACKGROUND

This report details the investigation of a sedimentation study of the Missouri River at Copeland Bend, River Miles 569 to 564.5. Micro Modeling was used to evaluate the sediment transport and lateral bankline erosion response trends that could be expected to occur in the river from various design alternatives and/or modifications.

Model testing alternatives were conceptualized and submitted by members of a study team representing the U.S. Army Corps of Engineers, Northwestern Division, Omaha, Kansas City and St. Louis Districts. The primary goal was to evaluate the impacts of these alternatives, if any, on the resultant bed configuration (sediment transport response) and lateral bankline erosion trends in Copeland Bend. Studying the effects of modifying existing dike structures for the improvement of the quantity and quality of aquatic habitat, while maintaining the integrity of the navigation channel, was the primary purpose of this study.

1. Problem Description

Plates 1, 2, and 3 are maps depicting the characteristics, configuration, and nomenclature of the Missouri River through this particular study reach. A combination of wooden pile and rock dike structures (Plate 2) have been constructed and maintained by the Omaha District to achieve a self maintaining navigation channel and stable channel alignment along the left descending bankline.

Between Miles 569 and 564.5, a total of 37 channel improvement structures exist on the river. The focus of this particular study was to examine the possibility of modifying structures located on the inside of Copeland Bend, between Miles 567.8 and 565.3, and examining the impacts of these modifications to the

condition of the adjacent navigation channel and to the stability of the left descending bankline.

In addition, changes or impacts to shallow water habitat on the inside of the bend were of a primary concern. It was highly desirable to create additional shallow water habitat and depth diversity throughout Copeland Bend for the generation of aquatic benefits within the overall river reach.

2. Field Investigation

In December of 1998, river engineers from the St. Louis District made a field investigation of the study reach. Plates 4 through 10 are photographs taken during this inspection. The following observations were noted:

- The downstream parabolic eddy formation generated from each of the dike structures along the inside of Copeland Bend was approximately as long as the spacing between dikes. Generally, it was estimated that the streamwise axis length of each eddy was approximately 3 times the effective length of each dike structure.
- The above observation indicated that the dikes, although not particularly long, were maximizing the available energy of the Missouri River. The dikes were effectively and efficiently protecting the left descending bankline on the inside of the riverbend.
- No excessive erosion was noted along the left descending bankline, indicating that a stable, average contraction width (bank to bank) of approximately 700 feet was being maintained by the dikes throughout Copeland Bend.

- All of the dikes were angled slightly downstream, which has caused small bankline roundouts to occur below each structure. The bankline roundouts appeared to be stable, however, and the integrity of the dikes was not in jeopardy.
- An unusual amount of mature trees were destroyed near and along the left descending bankline due to beaver impacts. This could cause future lateral erosion of the existing bankline.

MICRO MODEL DESCRIPTION

1. Scales and Bed Materials

Plate 11 is a photograph of the Copeland Bend hydraulic micro model used in this study. The scales were 1 inch = 300 feet, or 1:3600 horizontal, 1 inch = 20 feet, or 1:240 vertical, for a 15 to 1 distortion ratio. This distortion supplied the necessary forces required for the simulation of sediment transport conditions similar to those of the prototype. Both the bed material and the erodible floodplain section were composed of granular plastic urea, Type II, with a specific gravity of 1.23.

2. Apperturences

The model was constructed according to 1996 aerial photographs of the Missouri River. Flow was controlled via an electronic/computer program interfaced with a centrifugal pump and a mechanical process control valve. Stages and dike structures were recorded with a mechanical three-dimensional digitizer.

Bathymetry of the model bed was collected with a laser. Slope was controlled by rotational jacks located within the hydraulic flume. Dynamic flow and sediment transport equilibrium (model input and output) was maintained throughout all testing simulations.

MICRO MODEL TESTS

1. Calibration

The calibration of the micro model involved the adjustment of water discharge, sediment load, time scale, and slope. These parameters were adjusted until the measured bed response and the lateral bankline erosion trends of the model were similar to the prototype.

In this particular study, the banks and floodplain of the left descending bankline, between Miles 567.8 and 565.3, were comprised of the same material as the bed in order to study the impacts of future lateral erosion migration. All other bankline areas were fixed in the model. The modeling calibration approach was to establish a stable upper energy regime in the model in such a manner as to allow for both sufficient sediment transport in the navigation channel and reasonable erosion tendencies along the left descending bankline. An energy threshold was established in the model whereby a stable left descending "equilibrium" bankline was achieved during the base test.

Numerous repeated tests were conducted during the calibration of the model verifying that bankline equilibrium had been established. Field investigation indicated a stable left descending bankline in the prototype. Removal or compromise in the existing structures immediately initiated varying degrees of lateral erosion in the model.

A thin-walled metal template forming the prototype alignment configuration of the left descending bankline of the Missouri River, between Miles 567.8 and 565.3, was constructed based upon aerial photography. The elevation of the banks and floodplain landward of this template were molded with model sediment. After the template was removed, successive design hydrographs (Plate 12) were run until model stability was reached. The model was then surveyed, and a comparison

of the model bankline was made to the original bankline alignment of the template. Calibration variables were adjusted and the process was repeated until the bankline could be maintained in the model as close to the original prototype alignment (template alignment) as possible. Once this condition was achieved, the process was repeated several additional times to ensure replication. This stable model bankline was referenced on all plates as the “equilibrium line” and was delineated in blue for reference.

A. Design Hydrograph

The effective discharge run throughout this model study represented that hydrograph generating an average expected sediment response expected to occur in the prototype. Plate 12 shows the graph of this model hydrograph. Because of the constant variation experienced in the prototype, the effective discharge was used to theoretically analyze the average expected sediment response during any given year. During all testing, the design hydrograph was run successively until stability was observed in both the channel and along the left descending bankline.

It should be realized that because of the nature of the lightweight bed sediment materials that are typically used in movable bed models, hydrographs are not directly scaleable. Thus, in this particular study, although the peak stage of the hydrograph used for testing was at +5 CRP in the micro model, the energy of the model under this condition was representative of much higher flows experienced in the prototype. The design hydrograph then, in simplistic terms, represents an energy condition in the model that effectively enables the model to replicate realistic sediment response conditions similar those observed in the prototype.

B. Prototype Surveys

The 1996 and 1991 prototype surveys were used in this study to determine the general bed distribution characteristics that have existed in the prototype over recent years (Plates 13 and 14). All depths and color contours were referenced in feet above or below the Construction Reference Plane (CRP) established on the Missouri River.

The bathymetry indicated that the trends of the two surveys were very similar. Beginning at Mile 569.0, the channel thalweg was observed off the right descending bank, with depths between -15 and -20 CRP. Between Miles 568.6 and 568.2, thalweg depths decreased to between -10 and -15 CRP.

Between Mile 568.2 and 566.5, the thalweg was again located adjacent to the right descending bank, with depths between -15 and -20 CRP. Depths decreased near Mile 566.5 to between -10 and -15 CRP. Between Mile 566.5 and 565.3, the thalweg again developed against the right descending bank. Overall thalweg depths were between -15 and -20 CRP, with deeper thalweg depths of -20 and -30 CRP located between Mile 566.0 and 565.8. Within this segment, the navigation channel narrowed considerably, approximately 350 feet in width, as a result of the inside point bar formation between Mile 566.2 and 565.0.

The only crossing in the entire study reach was observed between Miles 565.3 and 565.0. Depths in the navigation channel were generally between -10 and -15 CRP. From Mile 565.0 to the end of the study reach, the thalweg developed against the left descending bank, with depths between -15 and -20 CRP.

There were slight deviations between the bed configurations of the two surveys worth noting. Dikes on the left descending bank along the study reach were generally more effective in generating localized scour in the 1991 survey as compared to the 1996 survey. In addition, the navigation channel was slightly

wider and shallower in the bend at Mile 566.0 and in the bend below Mile 565 in 1991 as compared to 1996.

2. Base Test

Plate 15 shows the resultant bed configuration of the micro model base test. The base test was developed from the simulation of successive design hydrographs until bed stability was reached and a similar bed response was achieved as compared with the prototype surveys. The observed trends of the model were as follows:

At Mile 569.0, the thalweg developed against the right descending bank. The thalweg remained against the right descending bank to Mile 566.7. Depths in the channel were predominately between -10 and -15 CRP, with the exception of two areas located at Miles 567.8 and 567.2. Depths in these areas were between -20 and -30 CRP.

Between Miles 566.7 and 566.2, the thalweg was not well defined, and depths decreased to -10 and -15 CRP.

Between Miles 566.2 and 565.4, the thalweg again developed adjacent to the right descending bank, with depth predominately at -15 to -20 CRP. Apex bend scour off the point bar at Mile 566.0 was between -20 and -30 CRP.

A crossing developed between Mile 565.4 and 565.0, with depths in the channel between -10 and -15 CRP. Below Mile 565.0, the thalweg developed off the left descending bank, with depths -15 to -30 CRP.

The general bathymetric trends of the base test were very similar to those of the two observed prototype surveys of 1991 and 1996. Generally, the thalweg was located in the same positions as in the prototype. The depositional patterns

along the left descending bank were also similar to the prototype, including the formation of the dominant point bar at Mile 566.0.

As described previously, the model allowed for lateral erosion between Miles 567.8 and 565.3. A model bankline equilibrium line was established during calibration (blue line, Plate 15). This line was approximately 0 to 300 feet to the left of the existing prototype bankline alignment (red line, Plate 15). This blue equilibrium line served as a comparison for all design alternative tests.

Plate 16 shows the flow visualization of the base test. All flow visualization photographs were captured throughout the model tests with the stage of the model at approximately + 2 CRP. Results indicated that the flow through the study reach was distributed fairly uniformly in the navigation channel, between the ends of the dikes and the right descending bankline, except at Mile 566.0, where flow was more concentrated at the apex of the bend adjacent to the point bar. The influence of the dikes in diverting flow away from the left descending bank and generating eddies was observed in the model. Flow visualization did not capture the eddies, however, the visualization did show the relative slower moving water within the dike field.

3. Design Alternative Tests

A number of design alternatives were tested in this study. The effectiveness of each plan was evaluated by comparing the resultant bed bathymetry of the plan test to the resultant bed bathymetry of the base test. A difference map was also generated for each alternative as compared to the base test. This map was generated mainly for assistance in visualizing changes that occurred within channel border areas along the left descending bank throughout the erodible section of the model. Sediment transport observed along this region was less dynamic than the main channel.

Less reliance on the difference maps were used in determining design alternative changes experienced in the main channel. Observed sediment transport in the main channel was very dynamic, which introduced a fair amount of natural "noise" similar to what could also be expected to occur in the prototype.

Alternative 1. Degrade All Existing Dikes To -2 CRP. Alternative 1 involved the degradation of all dikes to -2 CRP on the left descending bank, between Miles 567.8 and 565.3. Results (Plates 17, 18, 19) indicated the following trends:

Depths and widths in the navigation channel remained generally the same as in the base test. The left descending bankline moved landward from the base test equilibrium line approximately 200 feet on the average. Depths in this area increased between 0 and 15 feet, with the average depth increase between 2 and 5 feet.

Flow visualization showed that flow distribution through the main channel was similar to the base test. Flow still had a tendency to be concentrated at the apex of the bend at Mile 566.0. A greater amount of flow was observed within the dike fields as compared to the base test.

Alternative 2. Degrade All Dikes To -2 CRP and Add 16 New Chevrons At +2 CRP. Alternative 2 involved the degradation of all dikes to -2 CRP as in Alternative 1 and the addition of 16 new chevrons. The chevron crown elevations were placed in the model at +2 CRP. The chevrons were of the blunt-nosed type. Each deflection leg was 75 feet in length at a centerline deflection angle of 30 degrees. Radius of the blunt nose was approximately 25 feet. The chevrons were strategically placed in the middle of each dike spacing, except between dikes 612.0 and 611.85, where the structures were placed closer to the existing dikes. The chevrons were streamlined just within the dike endpoints for the purposes of generating maximum effects to the navigation channel. The goal was to place the structures as close to the main channel as possible but still

within the influence of the dike fields. Results (Plates 20, 21, 22) indicated the following trends:

Depths and widths in the navigation channel remained generally the same as in the base test. The left descending bankline moved slightly landward from the base test equilibrium line, between a few feet and approximately 150 feet.

Depths increased in these areas approximately 0 to 5 feet. Between Mile 565.9 and 565.7, the bankline moved riverward approximately 100 feet.

Flow visualization showed that flow distribution through the main channel was similar to the base test. Flow still had a tendency to be concentrated at the apex of the bend at Mile 566.0. A greater amount of flow was distributed over the dike fields as compared to the base test. A fair amount of flow developed along the left descending bankline as compared to the base test, between Miles 567.0 and 566.5. Visual observation indicated that some of the chevrons produced flow "shadows" directly downstream of each structure as a result of individual boundary effects.

Alternative 3. Degrade Alternating Dikes To -2 CRP. Alternative 3 involved the degradation of alternating dikes along the left descending bank. Results (Plates 23, 24, 25) indicated the following trends:

Depths and widths in the navigation channel remained generally the same as in the base test. Some additional shoaling was experienced in the navigation channel crossing between Mile 565.5 and 564.8.

The bankline moved slightly landward along the left descending bank as compared to the base test equilibrium line, between 0 and approximately 150 feet on the average. Depths increased between 0 and 5 feet. Between Mile 565.9 and 565.7, the bankline moved riverward approximately 100 feet.

Flow visualization showed that flow distribution through the main channel was similar to the base test. Flow still had a tendency to be concentrated at the apex of the bend at Mile 566.0. A greater amount of flow was distributed over the dike fields as compared to the base test.

Alternative 4. Degrade Alternating Dikes To -2 CRP And Add 16 New Chevrons At +2 CRP. Alternative 4 involved the degradation of alternating dikes to -2 CRP along the left descending bank in addition to 16 New Chevrons placed in the same configuration as Alternative 2. Results (Plates 26, 27, and 28) indicated the following trends:

Depths and widths in the navigation channel remained generally the same as in the base test. The left descending bankline laterally eroded landward from the base test equilibrium line approximately 200 feet on the average. Depths near the equilibrium line increased between 0 and 15 feet.

Flow visualization showed that flow distribution through the main channel was similar to the base test. Flow still had a tendency to be concentrated at the apex of the bend at Mile 566.0. Results also indicated that more flow was distributed over the dike fields as compared to the base test. In addition, some of the chevrons produced flow "shadows" directly downstream of each structure as a result of individual boundary effects, similar to what was observed in the previous Alternative 2.

Alternative 5. All Dikes Notched To -5 CRP. Alternative 5 involved excavating a 50-ft landward notch of all existing dikes between Miles 567.8 and 565.3. Results (Plates 29, 30, and 31) indicated the following trends:

Depths and widths in the navigation channel remained generally the same as in the base test. The left descending bankline eroded landward from the base test

equilibrium line approximately 150 to 200 feet on the average. Depths near the equilibrium line increased between 5 and 15 feet.

Flow visualization showed that flow distribution through the main channel was similar to the base test. Flow still had a tendency to be concentrated at the apex of the bend at Mile 566.0. Results also indicated a continuous path of developed, concentrated flow passing through most of the notched areas, along the left descending bankline. A sinuous flow pattern was also observed within the notched areas, between Miles 567.5 and 566.5.

Alternative 6. All Dikes Notched To -5 CRP and Add 16 New Chevrons At +2 CRP. Alternative 6 involved excavating a 50-ft landward notch on all existing dikes between Miles 567.8 and 565.3 in addition to 16 new chevrons strategically placed between the dikes as in Alternative 2. Results (Plates 32, 33, 34) indicated the following trends:

Depths and widths in the navigation channel were generally the same as in the base test. The left descending bankline eroded approximately 100 feet on the average, landward from the base test equilibrium line. Increased depths along this area were between 2 and 15 feet.

Flow visualization showed that flow distribution through the main channel was similar to the base test. Flow still had a tendency to be concentrated at the apex of the bend at Mile 566.0. Results indicated that a definite, secondary flow pattern was developed through the notches along the left descending bank. The flow pattern was roughly the width of the notches and contained a fair amount of sinuosity throughout the dike field. Observations also indicated that some of the chevrons produced flow "shadows" directly downstream of each structure as a result of individual boundary effects, similar to what was observed in the previous chevron alternatives.

Alternative 7. Degrade All Dikes To -2 CRP, Add 16 New Chevrons At +2 CRP, Add 6 New Bendway Weirs At -15 CRP.

Alternative 7 was a repeat of Alternative 2 with the addition of 6 Bendway Weirs placed in the navigation channel between Miles 566.2 and 565.8. Results (Plates 35, 36, 37) indicated the following trends:

Depths and widths in the navigation channel remained similar to the base test, except between Miles 566.2 and 565.0. In this stretch several changes occurred. Depths decreased within the Bendway Weir field approximately 15 feet as compared to the base test. The channel did not significantly widen adjacent to the weir field. Downstream of the weir field, the navigation channel narrowed between Miles 565.3 and 565.0.

The left descending bankline eroded slightly landward from the base test equilibrium line, between 0 and 150 feet on the average. Depths increased between 0 and 15 feet along this area. Between Miles 566.0 to 565.6, the bankline moved riverward approximately 200 feet.

Flow visualization indicated that changes in flow near the Bendway Weir field were not significantly different than what was observed in the base test. Observations also indicated that some of the chevrons produced flow "shadows" directly downstream of each structure as a result of individual boundary effects, similar to what was observed in the previous chevron alternatives.

Alternative 8. Bankline Degradation Test With Existing Dikes In Place.

Alternative 8 involved degrading the left descending bankline between 0 and 400 feet, or approximately 300 feet on the average landward from the base test equilibrium line, to a depth of approximately -10 CRP. Results (Plates 38, 39, 40) indicated the following:

Depths and widths in the navigation channel remained similar to the base test. Some slight deposition was observed in the channel between 566.6 and 566.7. Since the bankline was artificially degraded, no additional lateral erosion was observed.

Flow visualization indicated a greater amount of flow distributed over the dike field as compared to the base test. A continuous path of flow was observed along the excavated portion of the left descending bank.

Alternative 9. Existing Dikes Removed And Bankline Established Near Equilibrium. Alternative 9 involved removing the existing dikes on the left descending bank between Miles 567.8 and 565.3. This test was performed to study the effects of dike removal directly on the navigation channel, assuming that the bankline and contraction width would be maintained. Results (Plates 41, 42) indicated the following trends:

There was a trend for additional shoaling in the navigation channel from approximately Miles 567 to 565.5, but depths through this area still remained below project depths. However, at the downstream crossing, between Mile 565.2 and 564.9, shoaling in the channel was above project depths. In this particular test, it was hoped that the effects of dike removal could be directly studied while maintaining the bankline equilibrium line of the base test. However, it was evident that this condition could not be totally achieved because the bankline immediately started to move landward from the base test equilibrium line during repeated testing, especially along the lower half of the point bar, between Miles 566.7 and 565.3. This test clearly showed that the removal of the dikes immediately effected the stability of the bankline and the integrity of the navigation channel. Flow visualization was not conducted during this test.

Alternative 10. Existing Dikes Removed And Bankline Degraded.

Alternative 10 involved removing all existing dikes and degrading the left descending bankline approximately 300 feet landward from the equilibrium line, to a depth of – 10 CRP. Results (Plates 43, 44, 45) indicated the following:

There was a tendency for minor shoaling to occur between Miles 567.4 and 567.2 similar to what was observed in Alternative 9. Between Miles 567.0 and 566.0, a loss of width and depth was experienced in the navigation channel. At Mile 565.1, a considerable amount of scour was experienced, indicating direct attack on the fixed bank portion of this reach of the model.

The left descending bankline eroded considerably landward from the excavated 300 foot alignment. The lower one half of the point bar, between Miles 556.3 and 565.5, receded on the average approximately 400 feet landward of the equilibrium line. The upper one half of the point bar, between Miles 567.4 to Miles 566.3, receded approximately 300 to 400 feet landward from the equilibrium line.

Flow visualization indicated a greater amount of flow distributed over the point bar as compared to the base test. A continuous path of flow was also observed along the excavated portion of the left descending bank.

RESULTS AND CONCLUSIONS

1. Summary of Model Tests

- Alternatives 1 through 6, which incorporated changes to the existing structures and/or additions of chevron structures, produced no major negative effects to the general depth and width trends of the navigation channel. These alternatives, to a varying degree, all showed a tendency for increased lateral erosion of the left descending bankline. However, in all cases, the lateral erosion reached a state of equilibrium in the model, whereas no further movement of the bankline was noted. Long term meandering tendencies along the inside of the bend or redirection of the channel thalweg as a result of these measures were not observed during these tests.
- Alternative 6 seemed to provide the greatest amount of diversity and environmental benefits as compared to all other alternatives. Flow visualization showed increased flow sinuosity through the notched areas, increased flow distribution over the dike fields, and positive boundary effects from both the dikes and the chevrons. Depths and widths in the navigation channel were still maintained.
- Alternative 7 showed that although the Bendway Weirs incurred some deposition within the weir field, the structures did not generate any major increase in adjacent navigation channel width.
- Alternative 8 showed that a relatively large amount of bankline degradation and increased depth distribution could be permitted on the inside of Copeland Bend as long as the existing dikes were not removed. Alternative 9 showed that the removal of all dikes threatened the integrity of the navigation channel.

- Flow visualization showed that the critical area where structural modifications had the most significant effect was between Miles 566.8 and Miles 566. Within this area, flow had a general tendency to widen out, probably due the combination of both the modifications and the loss of momentum through the channel.
- Alternative 10 showed that a contraction line width expansion of approximately 25 to 40 percent, incurred by the removal of all existing dikes as well as excavation of the existing bankline, would compromise the integrity of the navigation channel between Miles 567.0 and 566.0. This alternative was considered an extreme measure and was tested in order to gain a better understanding of how much change in contraction width could be tolerated without adversely affecting the navigation channel.
- Alternatives 8, 9 and 10 demonstrated that if extreme measures along the inside of Copeland Bend were incorporated (major excavation of the bankline or allowing substantial natural lateral erosion to occur), then the existing dike structures should be maintained to allow adequate conveyance of flow in the main channel.
- The model tests indicated that adequate navigation channel dimensions could be maintained in the model for alternatives 1,2,3,4,5,6, and 8. Visual observation of the model during these tests indicated that stable channel conditions as a result of the fixed contraction widths upstream and downstream of Copeland Bend played a large part in the positive sediment transport response achieved through the bend. The dike modification reach (approximately 2.5 miles) was relatively short. All proposed dike modifications occurred on the inside of the bend where energy was much lower. In addition, these measures still maintained most of the physical attributes of the existing dikes, with relatively minor structural modifications.

2. Interpretation of Model Test Results

In the interpretation and evaluation of the results of the tests conducted, it should be remembered that the results of these model tests were qualitative in nature. Any hydraulic model, whether physical or numerical, is subject to biases introduced as a result of the inherent complexities that exist in the prototype. Anomalies in actual hydrographic events, such as prolonged periods of high or low flows, are not reflected in these results, nor are any complex physical phenomena, such as the existence of underlying rock formations or other non-erodible variables.

This particular study effort also examined general erosion trends, a complex physical phenomena which lends to a large amount of assumptions. Without conducting extensive floodplain borings, it is extremely difficult to accurately predict future erosion rates or planform development. A homogenous material was used in the micro model for this analysis, while the prototype no doubt contains a varying degree of soil types, rock, and vegetative root wads. The intent of using the model in this regard was to examine contraction width change effects upon the overall sediment transport efficiency response in the navigation channel.


The model study was intended to serve as a tool to the engineer to guide in accessing the general trends that could be expected to occur in the actual river from a variety of imposed alternatives. Measures for final design may be modified based upon special requirements, real estate and construction considerations, environmental impacts, engineering knowledge, etc.

APPENDIX


The following is a list of all plates to follow in numbered order:

- Plate 1. Vicinity Map of Micro Model Study Reach
- Plate 2. Study Reach Map
- Plate 3. Study Reach Map
- Plate 4. Field Photos of Dec. 21, 1998
- Plate 5. Field Photos of Dec. 21, 1998
- Plate 6. Field Photos of Dec. 21, 1998
- Plate 7. Field Photos of Dec. 21, 1998
- Plate 8. Field Photos of Dec. 21, 1998
- Plate 9. Field Photos of Dec. 21, 1998
- Plate 10. Field Photos of Dec. 21, 1998
- Plate 11. Photograph of Copeland Bend Micro Model
- Plate 12. Model Design Hydrograph
- Plate 13. 1991 Prototype Survey
- Plate 14. 1996 Prototype Survey
- Plate 15. Base Test
- Plate 16. Flow Visualization, Base Test
- Plate 17. Alternative 1
- Plate 18. Alternative 1 Difference Map
- Plate 19. Flow Visualization, Alternative 1
- Plate 20. Alternative 2
- Plate 21. Alternative 2 Difference Map
- Plate 22. Flow Visualization, Alternative 2
- Plate 23. Alternative 3
- Plate 24. Alternative 3 Difference Map
- Plate 25. Flow Visualization, Alternative 3
- Plate 26. Alternative 4
- Plate 27. Alternative 4 Difference Map
- Plate 28. Flow Visualization, Alternative 4

Plate 29. Alternative 5
Plate 30. Alternative 5 Difference Map
Plate 31. Flow Visualization, Alternative 5
Plate 32. Alternative 6
Plate 33. Alternative 6 Difference Map
Plate 34. Flow Visualization, Alternative 6
Plate 35. Alternative 7
Plate 36. Alternative 7 Difference Map
Plate 37. Flow Visualization, Alternative 7
Plate 38. Alternative 8
Plate 39. Alternative 8 Difference Map
Plate 40. Flow Visualization, Alternative 8
Plate 41. Alternative 9
Plate 42. Alternative 9 Difference Maps
Plate 43. Alternative 10
Plate 45. Alternative 10 Difference Maps
Plate 46. Flow Visualization, Alternative 10

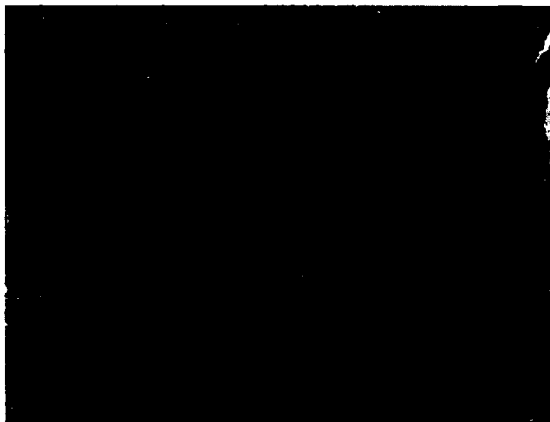

Study Reach

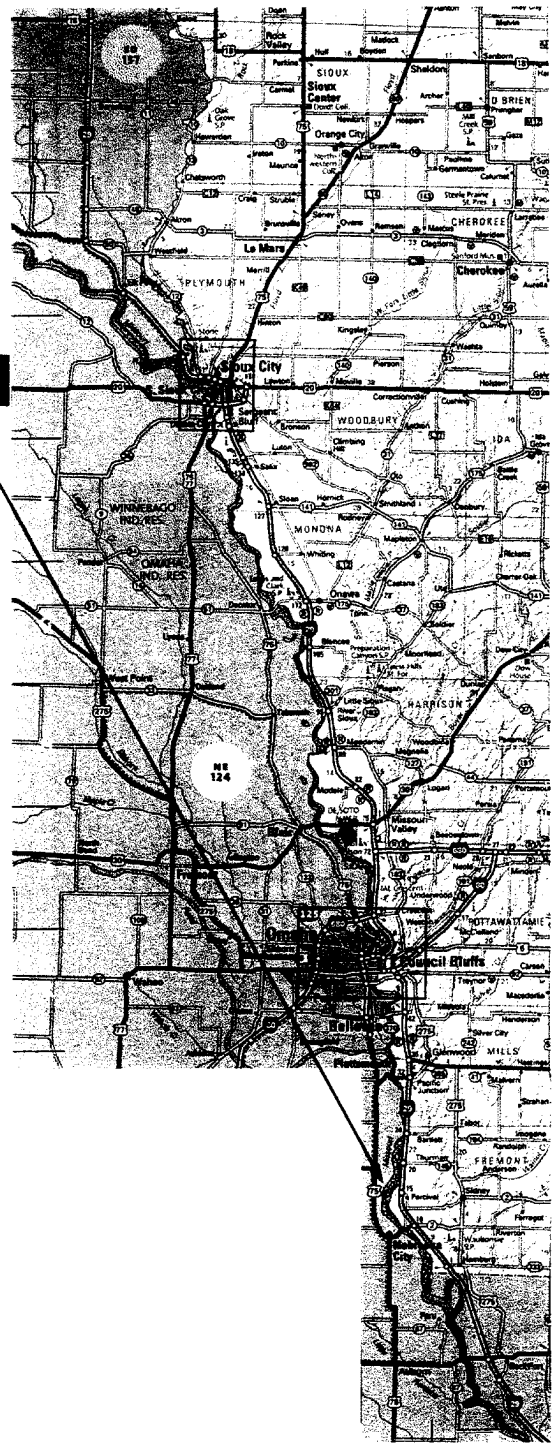

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA


PREPARED BY: A. Rhoads
CHECKED BY: R. Davinoy

DATE: JULY, 1999

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER COPELAND BEND
RIVER MILES 569 TO 564.5
VICINITY MAP OF MICRO MODEL STUDY REACH

PLATE NO.

1

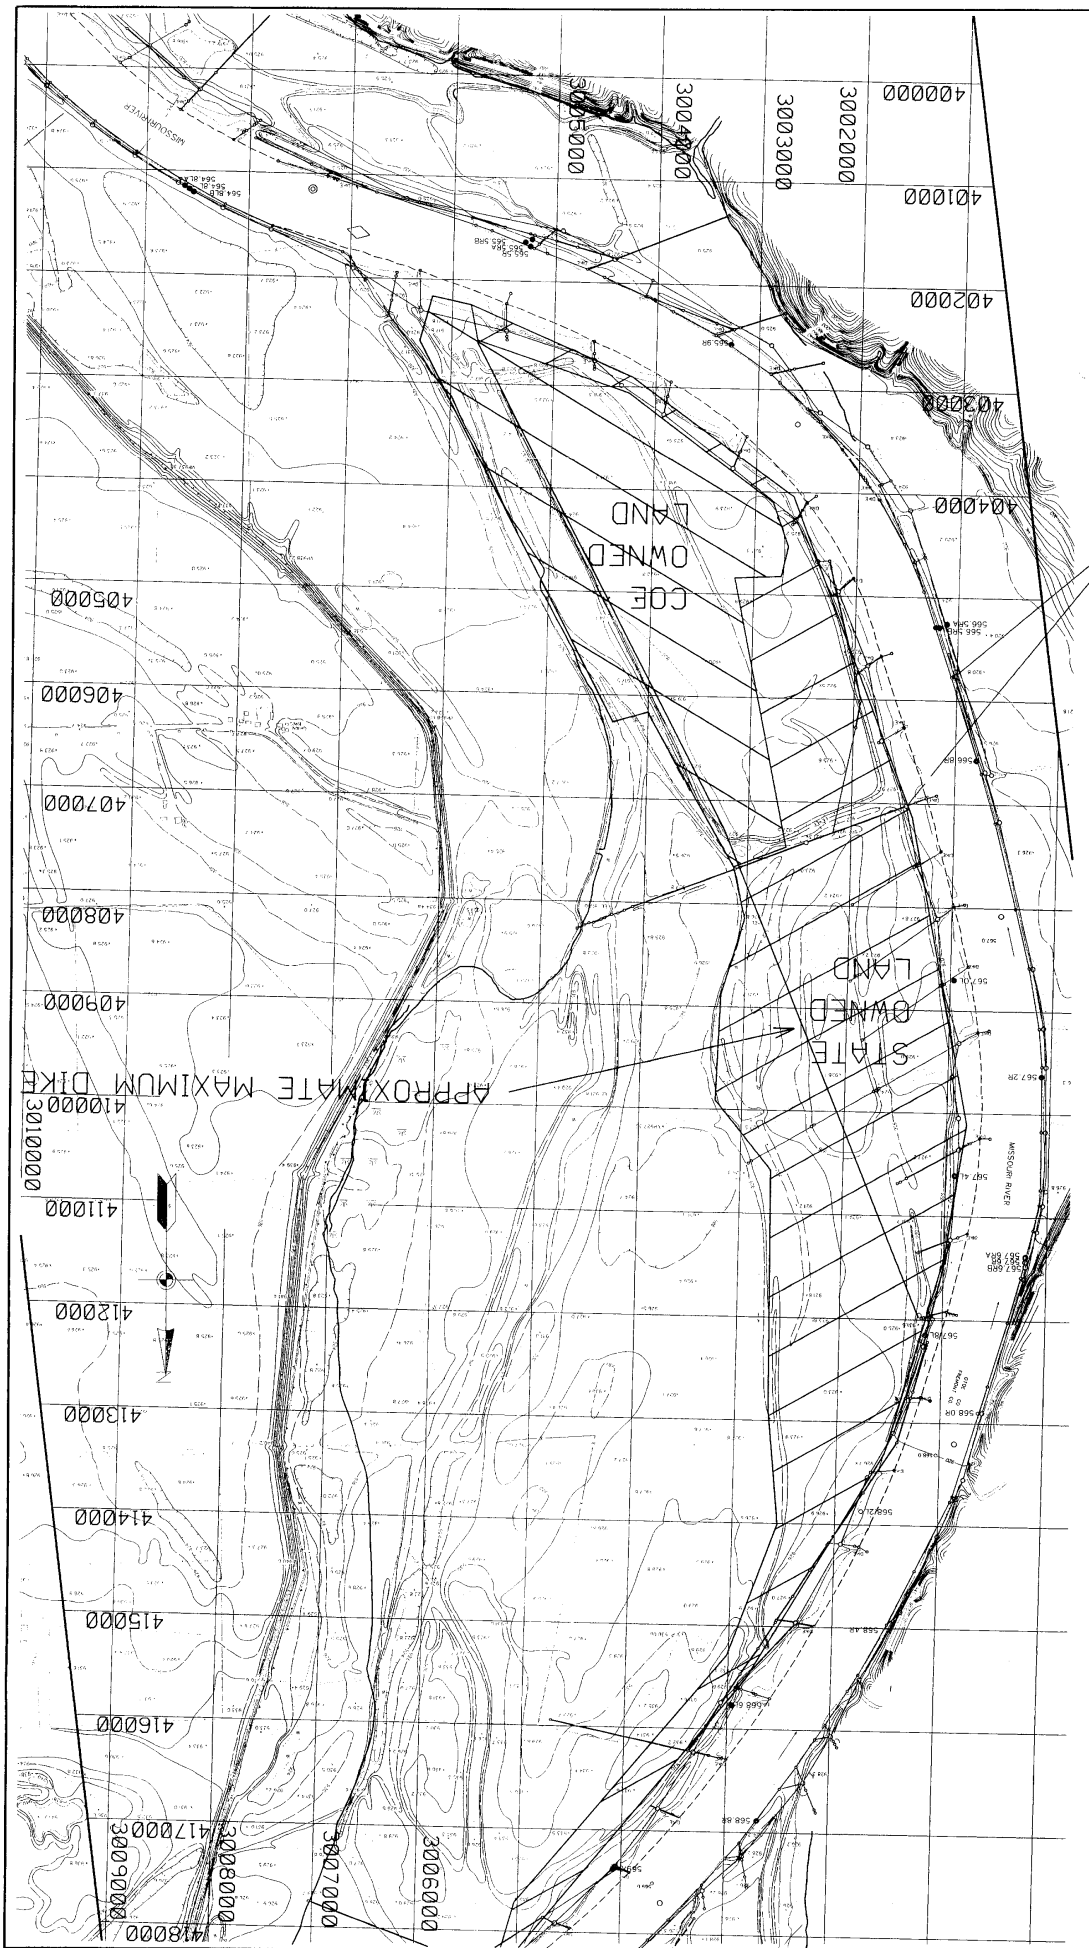


U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA




SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER REACH
RIVER MILES 569 TO 564.5
STUDY REACH MAP

PREPARED BY: R. DANABOY
DRAWN BY: J. REEF
CHECKED BY: J. DANABOY
DATE: JUNE, 1988

DESIGN FILE: CORP/ENR/100
PLOT SCALE: 1:500
PLOT DATE: 6/25/88
PLATE NO. 2

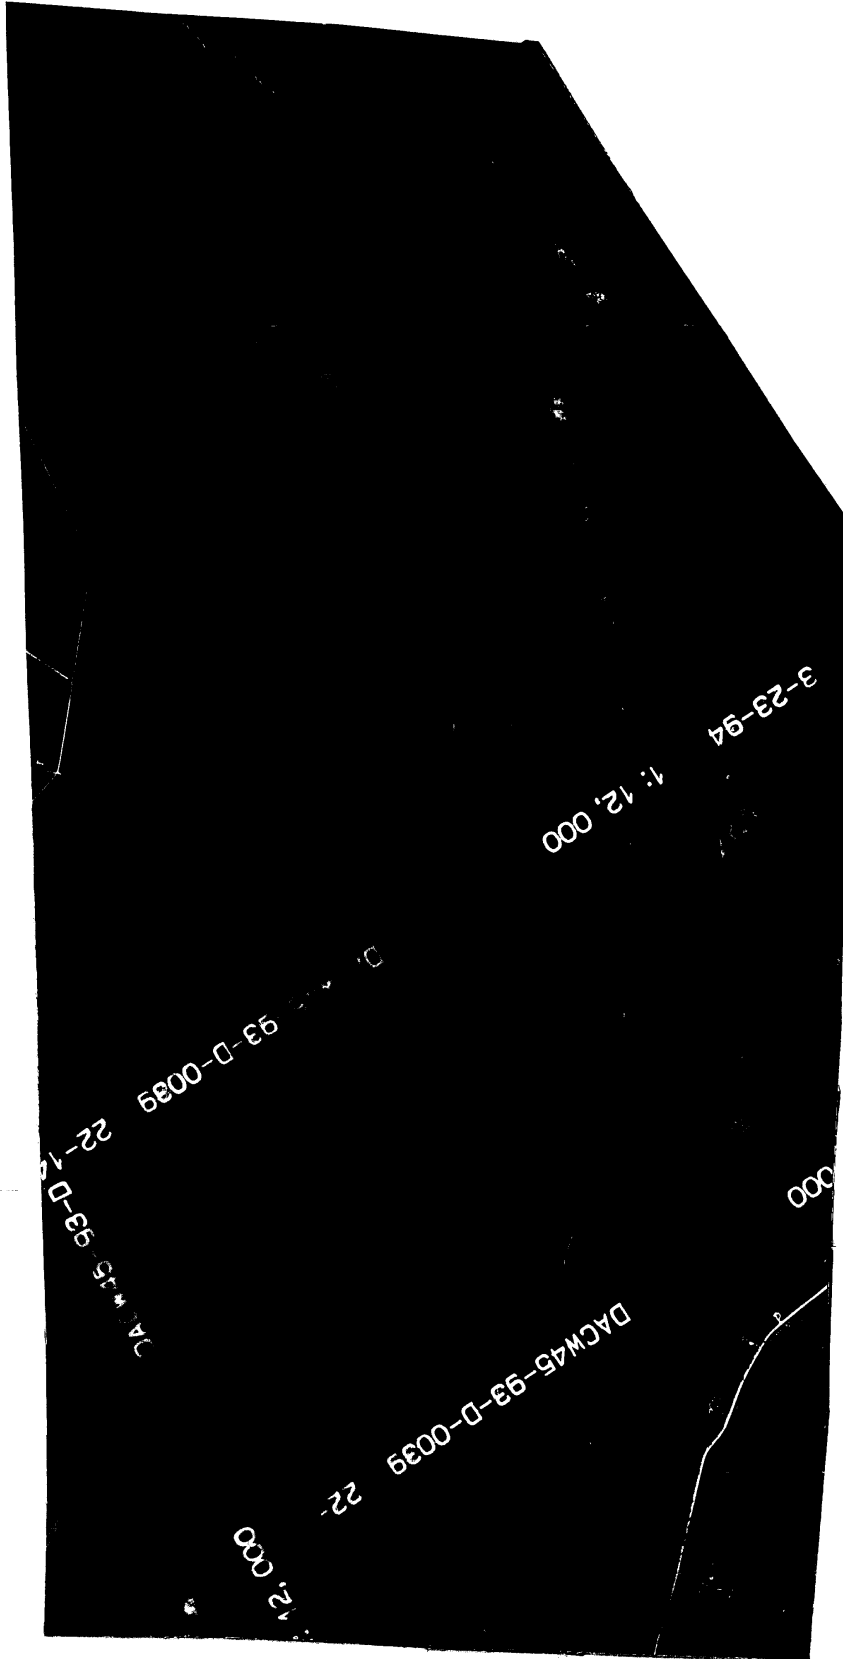

	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA	
	SEDIMENTATION STUDY - MICRO MODEL STUDY MISSOURI RIVER COPELAND BEND RIVER MILES 569 TO 564.5 STUDY REACH MAP	
PREPARED BY: R. J. JAWORSKY CHECKED BY: R. J. JAWORSKY DATE: JULY, 1999		SCALE: 1:12,000 DATE: 7/19/99 PLATE NO. 3

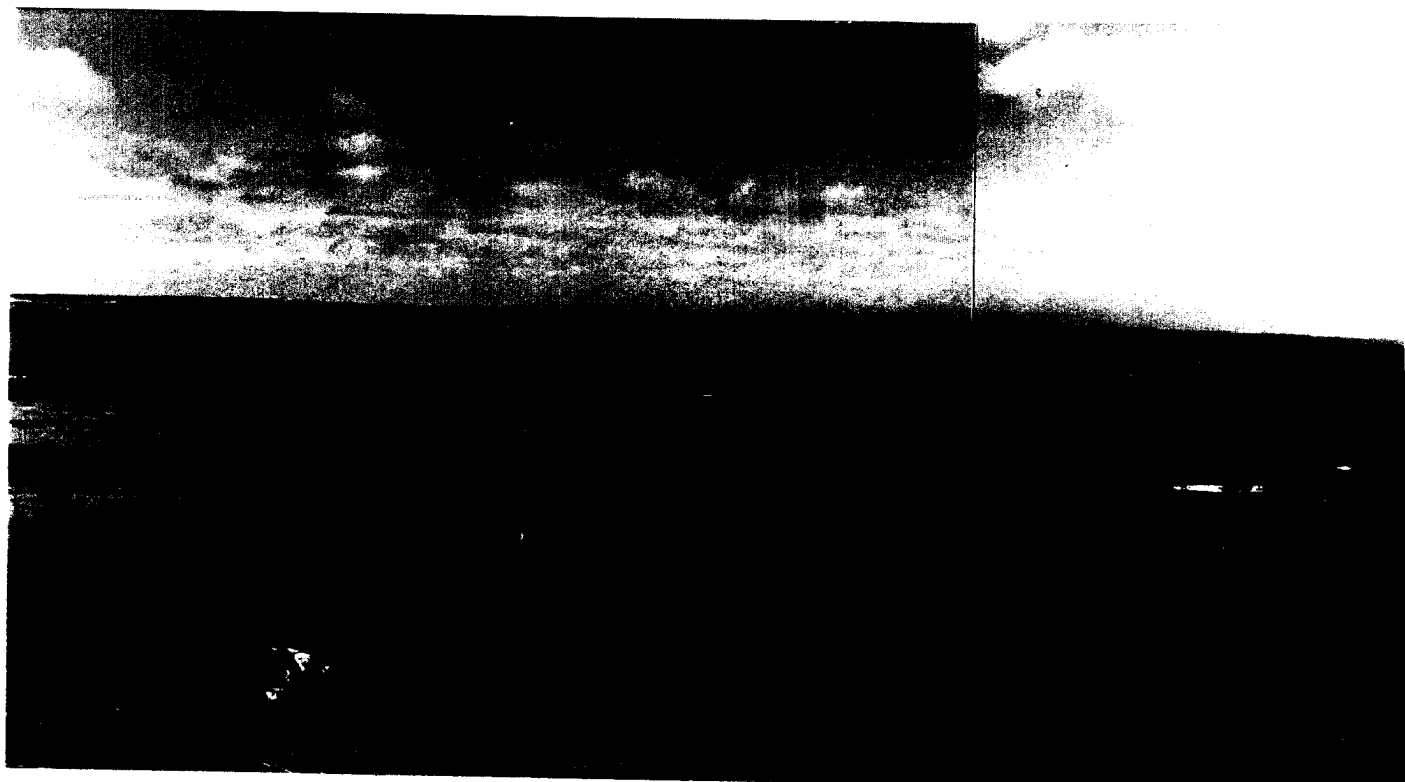

**Copeland Bend, Looking Across the Floodplain Toward
the Left Descending Bank, From Nebraska Bluff**



**U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA**

PREPARED BY: R. Davinroy
CHECKED BY: D. Gordon

DATE: FEBRUARY, 1999

**Sedimentation Study
Missouri River, Copeland Bend
Field Photos of Dec. 21, 1998**

Field Conditions: Temp 5° Wind-chill -30° Flurries

PLATE NO.

4



Copeland Bend, Looking Upstream at Dike 612.5



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. Davinroy
CHECKED BY: D. Gordon

DATE: FEBRUARY, 1999

Sedimentation Study
Missouri River, Copeland Bend
Field Photos of Dec. 21, 1998

Field Conditions: Temp 5° Wind-chill -30° Flurries

PLATE NO.

5



Copeland Bend, Looking Downstream At Dike 612.5



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. Davinroy
CHECKED BY: D. Gordon

DATE: FEBRUARY, 1999

Sedimentation Study
Missouri River, Copeland Bend
Field Photos of Dec. 21, 1998

Field Conditions: Temp 5° Wind-chill -30° Flurries

PLATE NO.

6



Copeland Bend, Looking Downstream From Dike 612.5



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. Davinoy
CHECKED BY: D. Gordon

DATE: FEBRUARY, 1999

Sedimentation Study
Missouri River, Copeland Bend
Field Photos of Dec. 21, 1998

Field Conditions: Temp 5° Wind-chill -30° Flurries

PLATE NO.

7



Copeland Bend, Looking Upstream at Dike 612.6



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. Davinroy
CHECKED BY: D. Gordon

DATE: FEBRUARY, 1999

Sedimentation Study
Missouri River, Copeland Bend
Field Photos of Dec. 21, 1998

Field Conditions: Temp 5° Wind-chill -30° Flurries

PLATE NO.

8



Copeland Bend, Looking Directly at Dike 612.6



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. Davinoy
CHECKED BY: D. Gordon

DATE: FEBRUARY, 1999

Sedimentation Study
Missouri River, Copeland Bend
Field Photos of Dec. 21, 1998

Field Conditions: Temp 5° Wind-chill -30° Flurries

PLATE NO.

9



Copeland Bend, Looking Upstream at Dike 612.7



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. Davinroy
CHECKED BY: D. Gordon

DATE: FEBRUARY, 1999

Sedimentation Study
Missouri River, Copeland Bend
Field Photos of Dec. 21, 1998

Field Conditions: Temp 5° Wind-chill -30° Flurries

PLATE NO. 10



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA


PREPARED BY: R. DAVARDOY
DRAWN BY: E. REIF
CHECKED BY: R. DAVARDOY
DATE: JUNE, 1959

SEDIMENTATION STUDY - MISSOURI RIVER
MISSOURI RIVER COPELAND BEND
RIVER MILES 569 TO 564.5
PHOTOGRAPH OF COPELAND BEND, MICRO MODEL

DESIGN FILE: COPELAND.BND

PLOT DATE: 8/2/1959

PLATE NO. 11

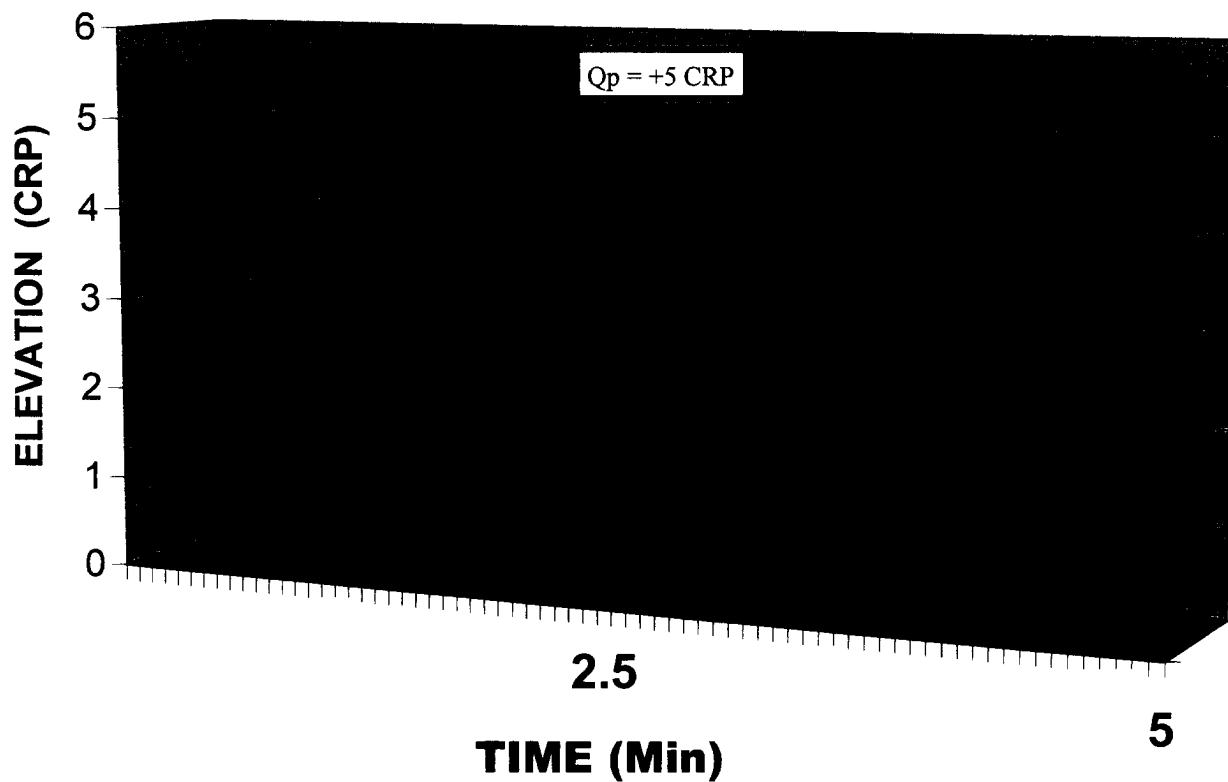

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. Davkroy
CHECKED BY: D. Gordon

DATE: FEBRUARY, 1999


Sedimentation Study
Missouri River, Copeland Bend

Model Design Hydrograph

PLATE NO.

12

ELEVATIONS REFERENCED
TO CRP



IOWA
FREMONT COUNTY

NEBRASKA
OTOE COUNTY



DESIGNED BY: R. J. JAWORSKY
DRAWN BY: E. RUFF
CHECKED BY: R. J. JAWORSKY
DATE: JUNE 1999

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, OTOE AND BEND
RIVER MILES 569 TO 584.5
1991 PROTOTYPE SURVEY




DESIGN FILE DIVISION
PLOT SCALE: 1:500

PLOT DATE: 8/2/98

PLATE NO.
13



ELEVATIONS REFERENCED
TO CRP



IOWA
FREMONT COUNTY


NEBRASKA
OTOE COUNTY




U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

DESIGNED BY R. JAYKOPF
DRAWN BY J. JAYKOPF
CHECKED BY J. JAYKOPF
DATE 10-1-66

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER COPELAND BEND
RIVER MILES 569 TO 564.5
1996 PROTOTYPE SURVEY




14

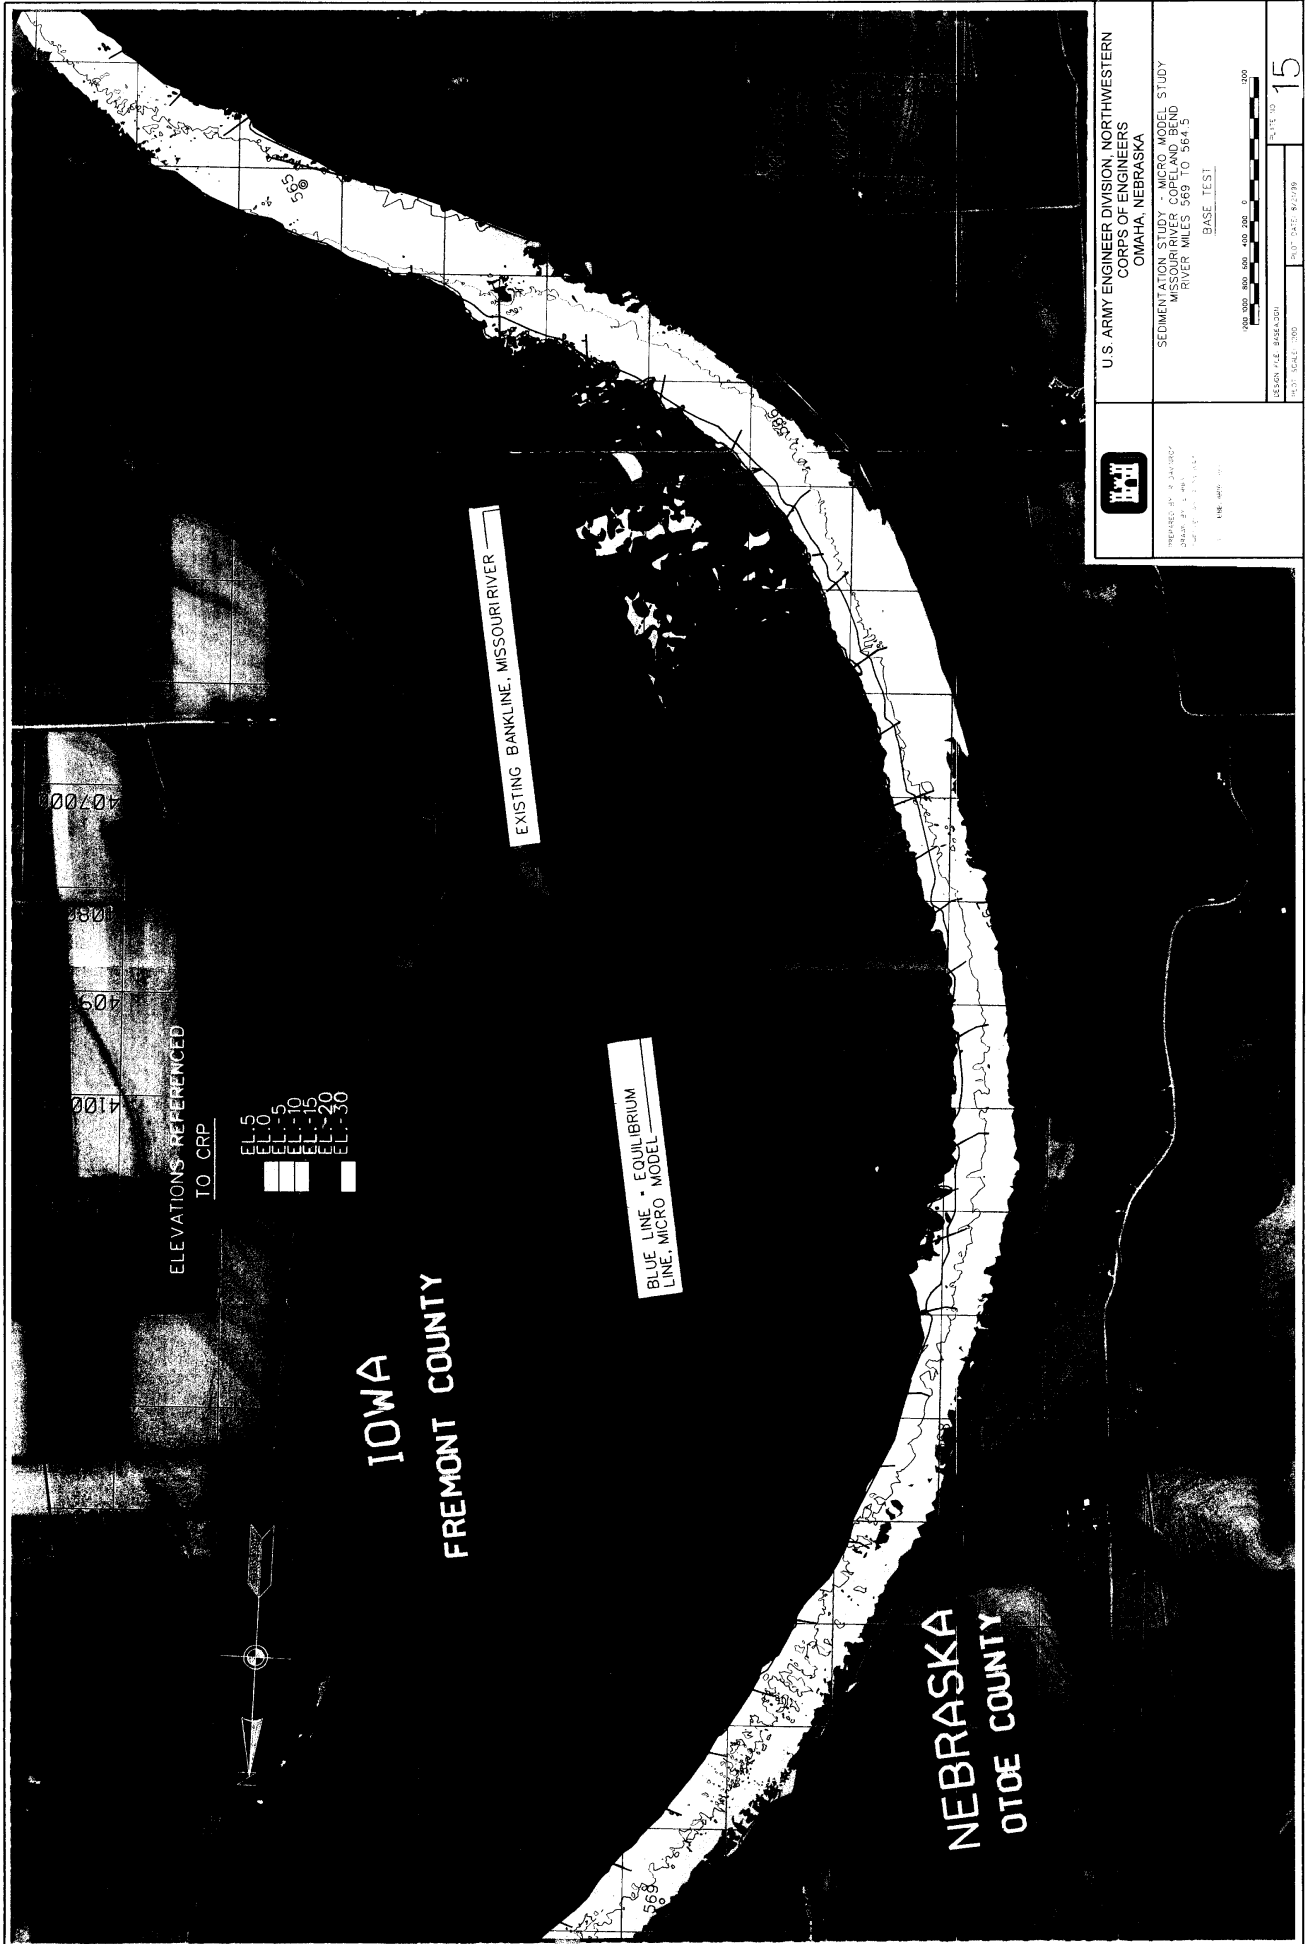




U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA


PREPARED BY: J. J. JENSEN
DATE: 21 JAN 1967
PROJECT: 67-1-100-100

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
BASE TEST

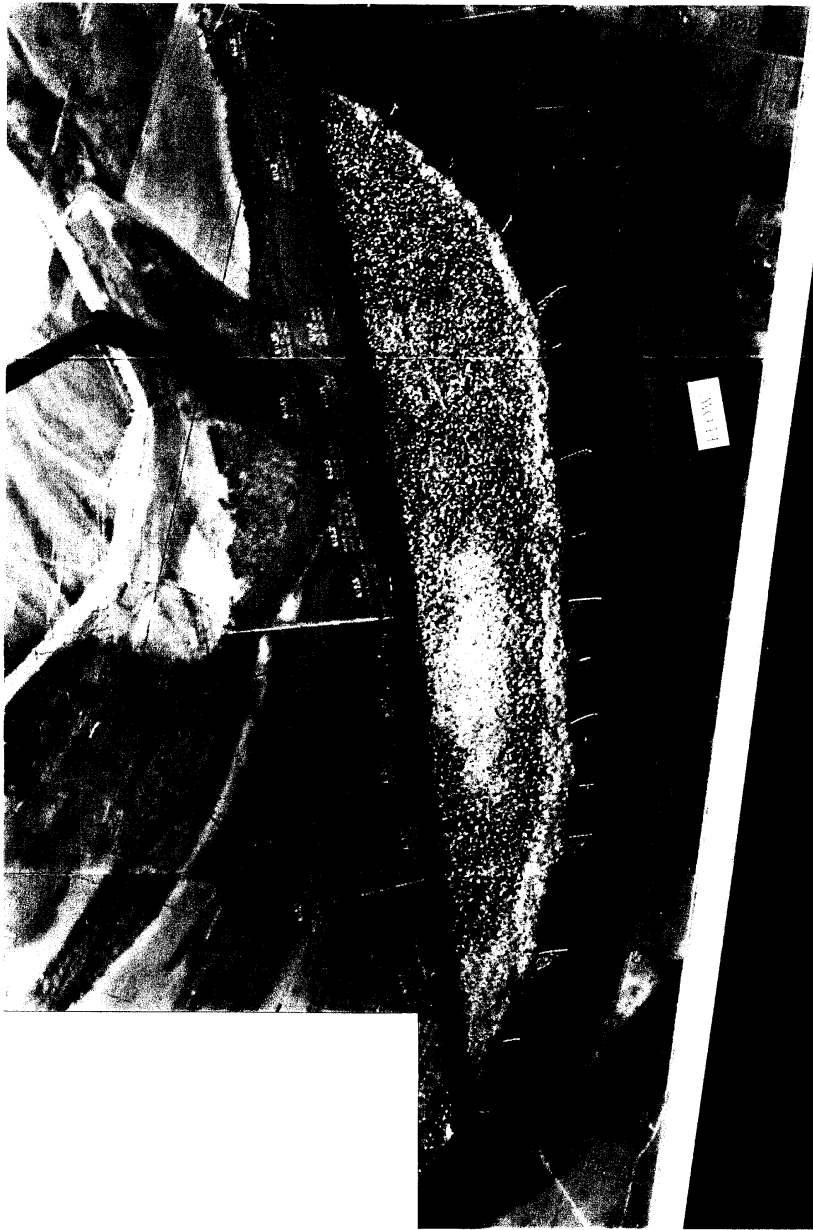



	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA
PREPARED BY: E. C. Carney CHECKED BY: D. Gordon DATE: FEBRUARY 1959	Sedimentation Study Missouri River, Copeland Bend Flow Visualization Base Test 
	PLATE NO. 16

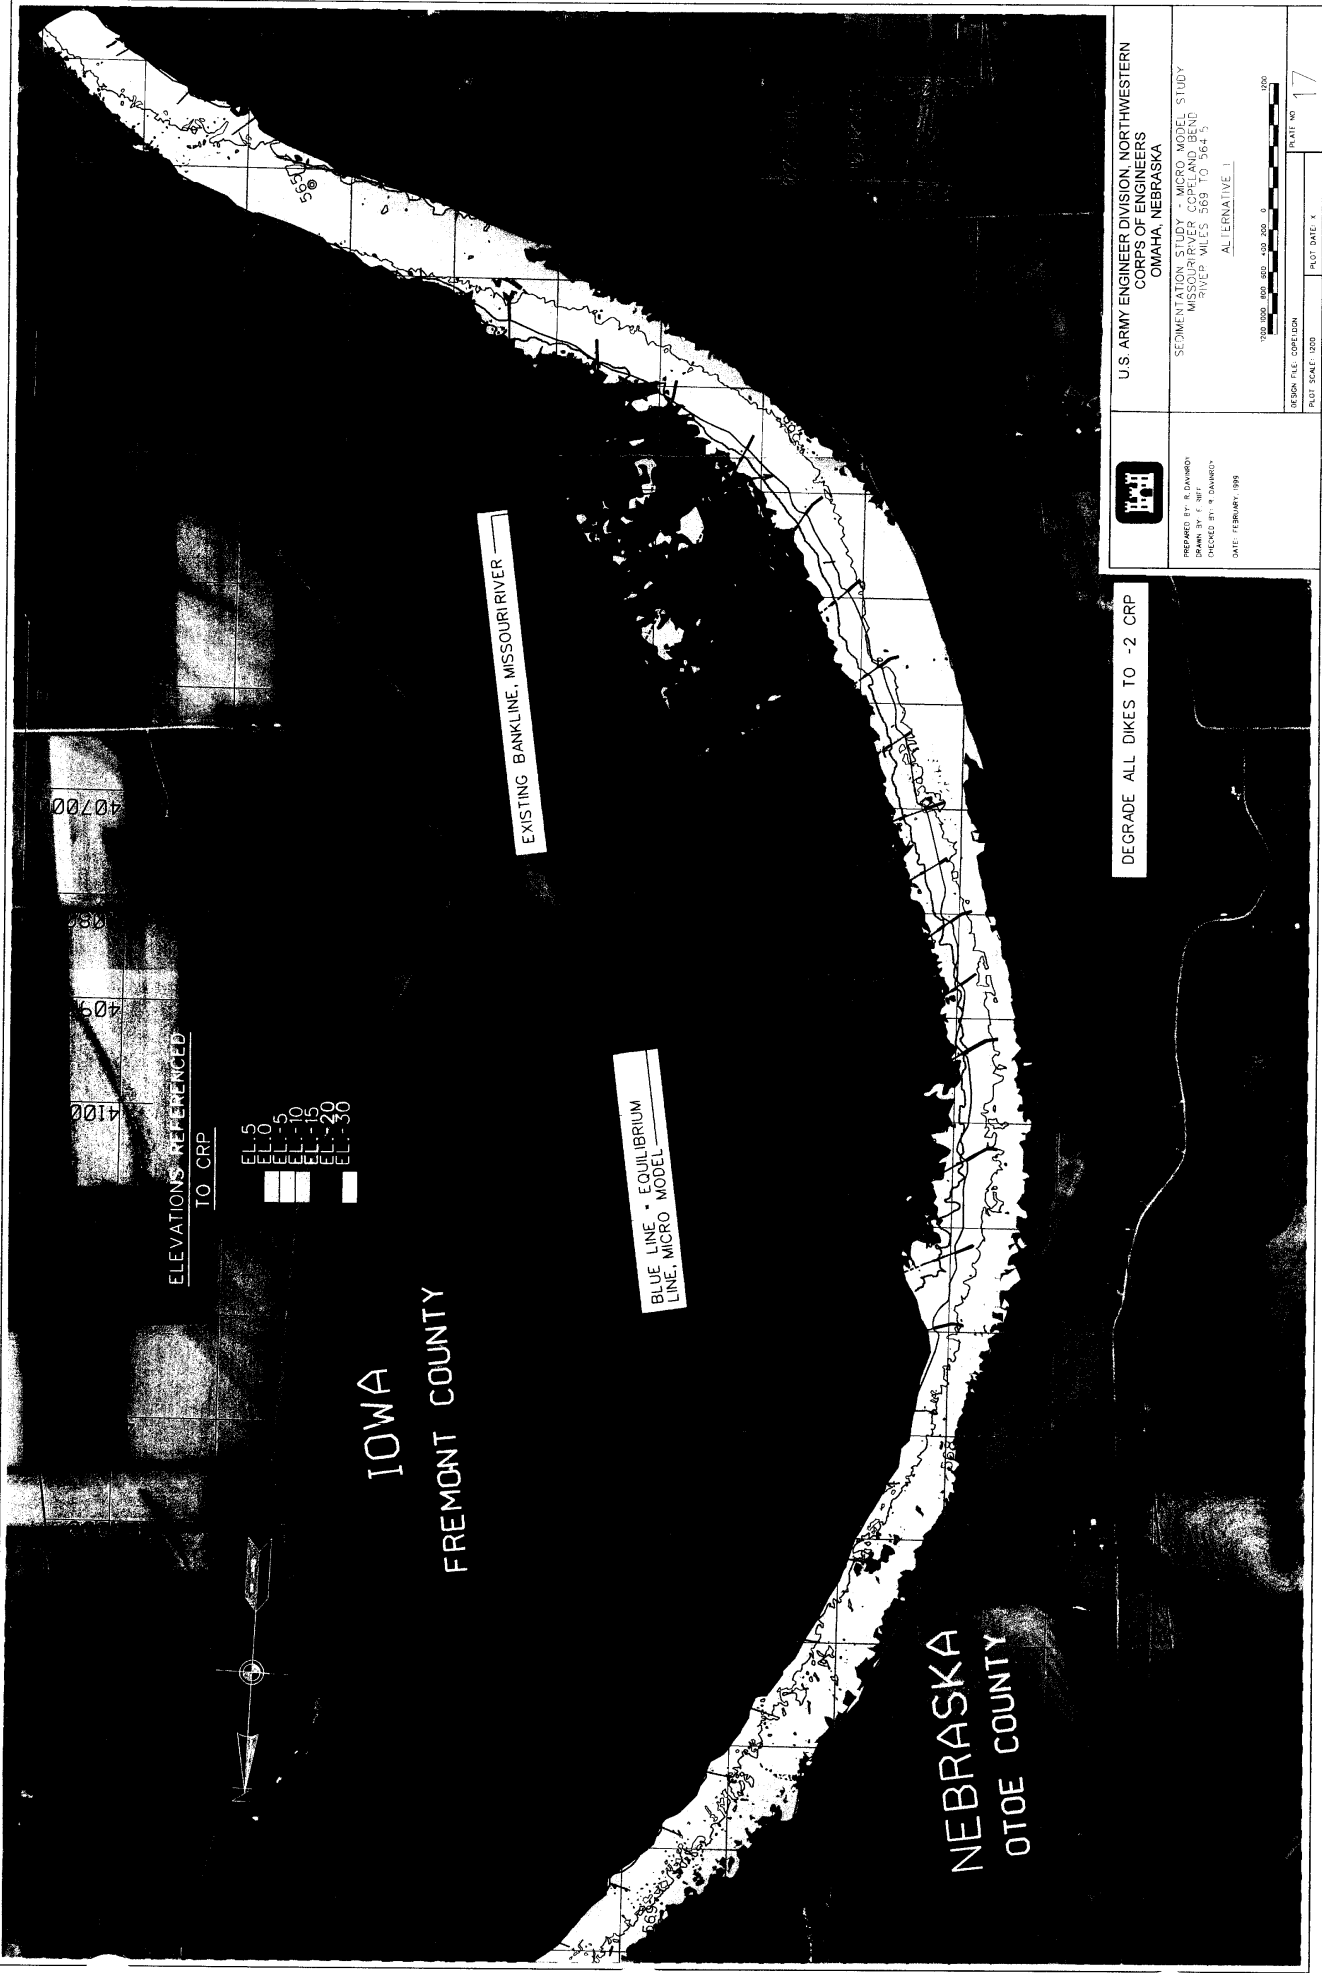



DEGRADE ALL DIKES TO -2 CRP

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. DAVISON
DRAWN BY: F. REIT
CHECKED BY: R. DAVISON
DATE: FEBRUARY 1988

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 1



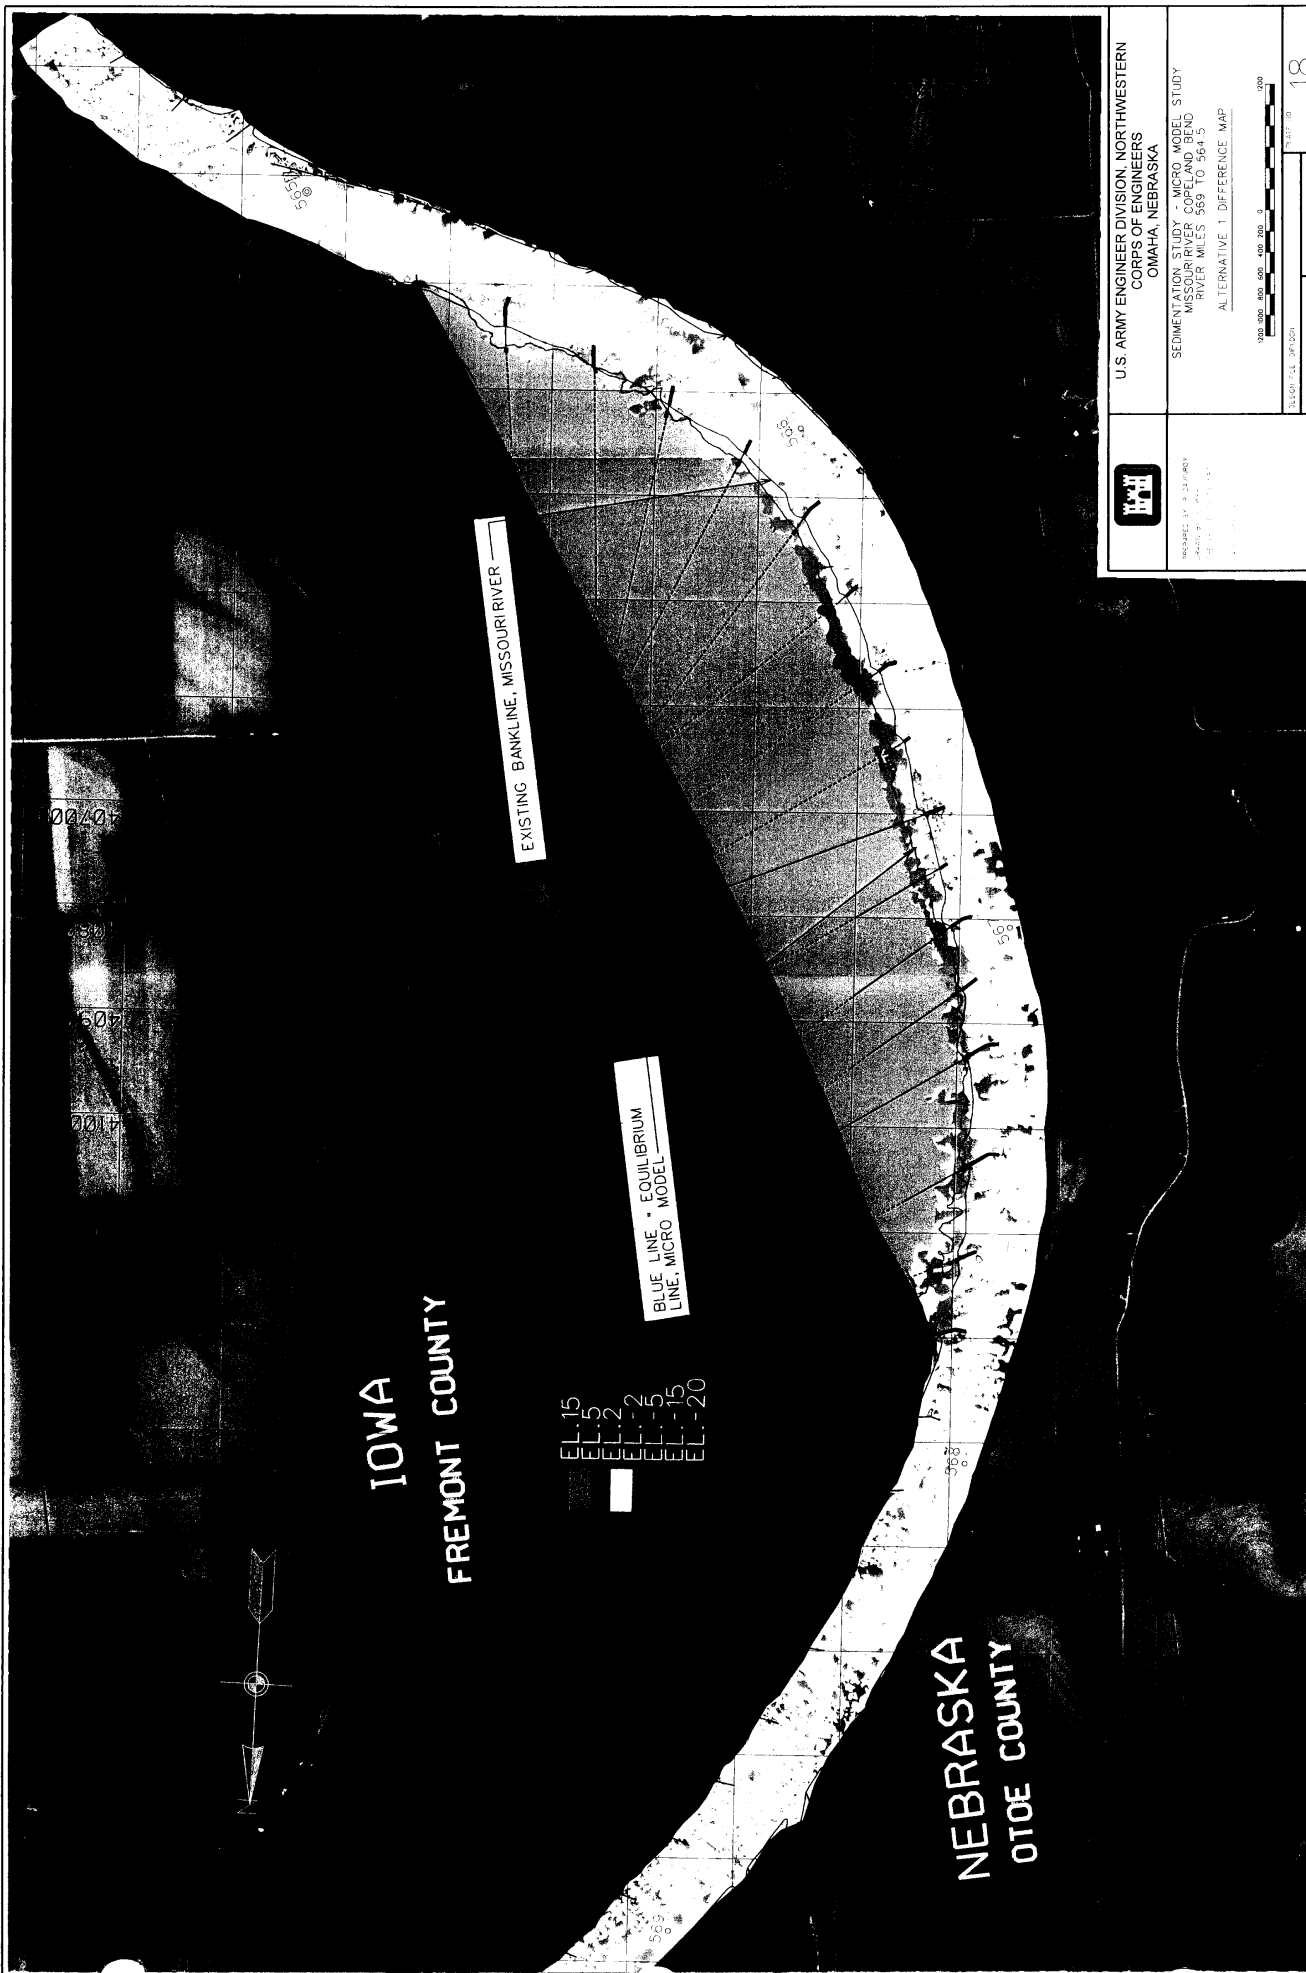



PREPARED BY: A. H. H. H.
CHECKED BY: F. L. H. H.

DATE: 11/1/77

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

Sedimentation Study, Missouri River
Copeland Bend, Flow Visualization
Alternative 1


Degrade All Dikes to -2 CRP

0 1000

SCALE

PLATE NO

19

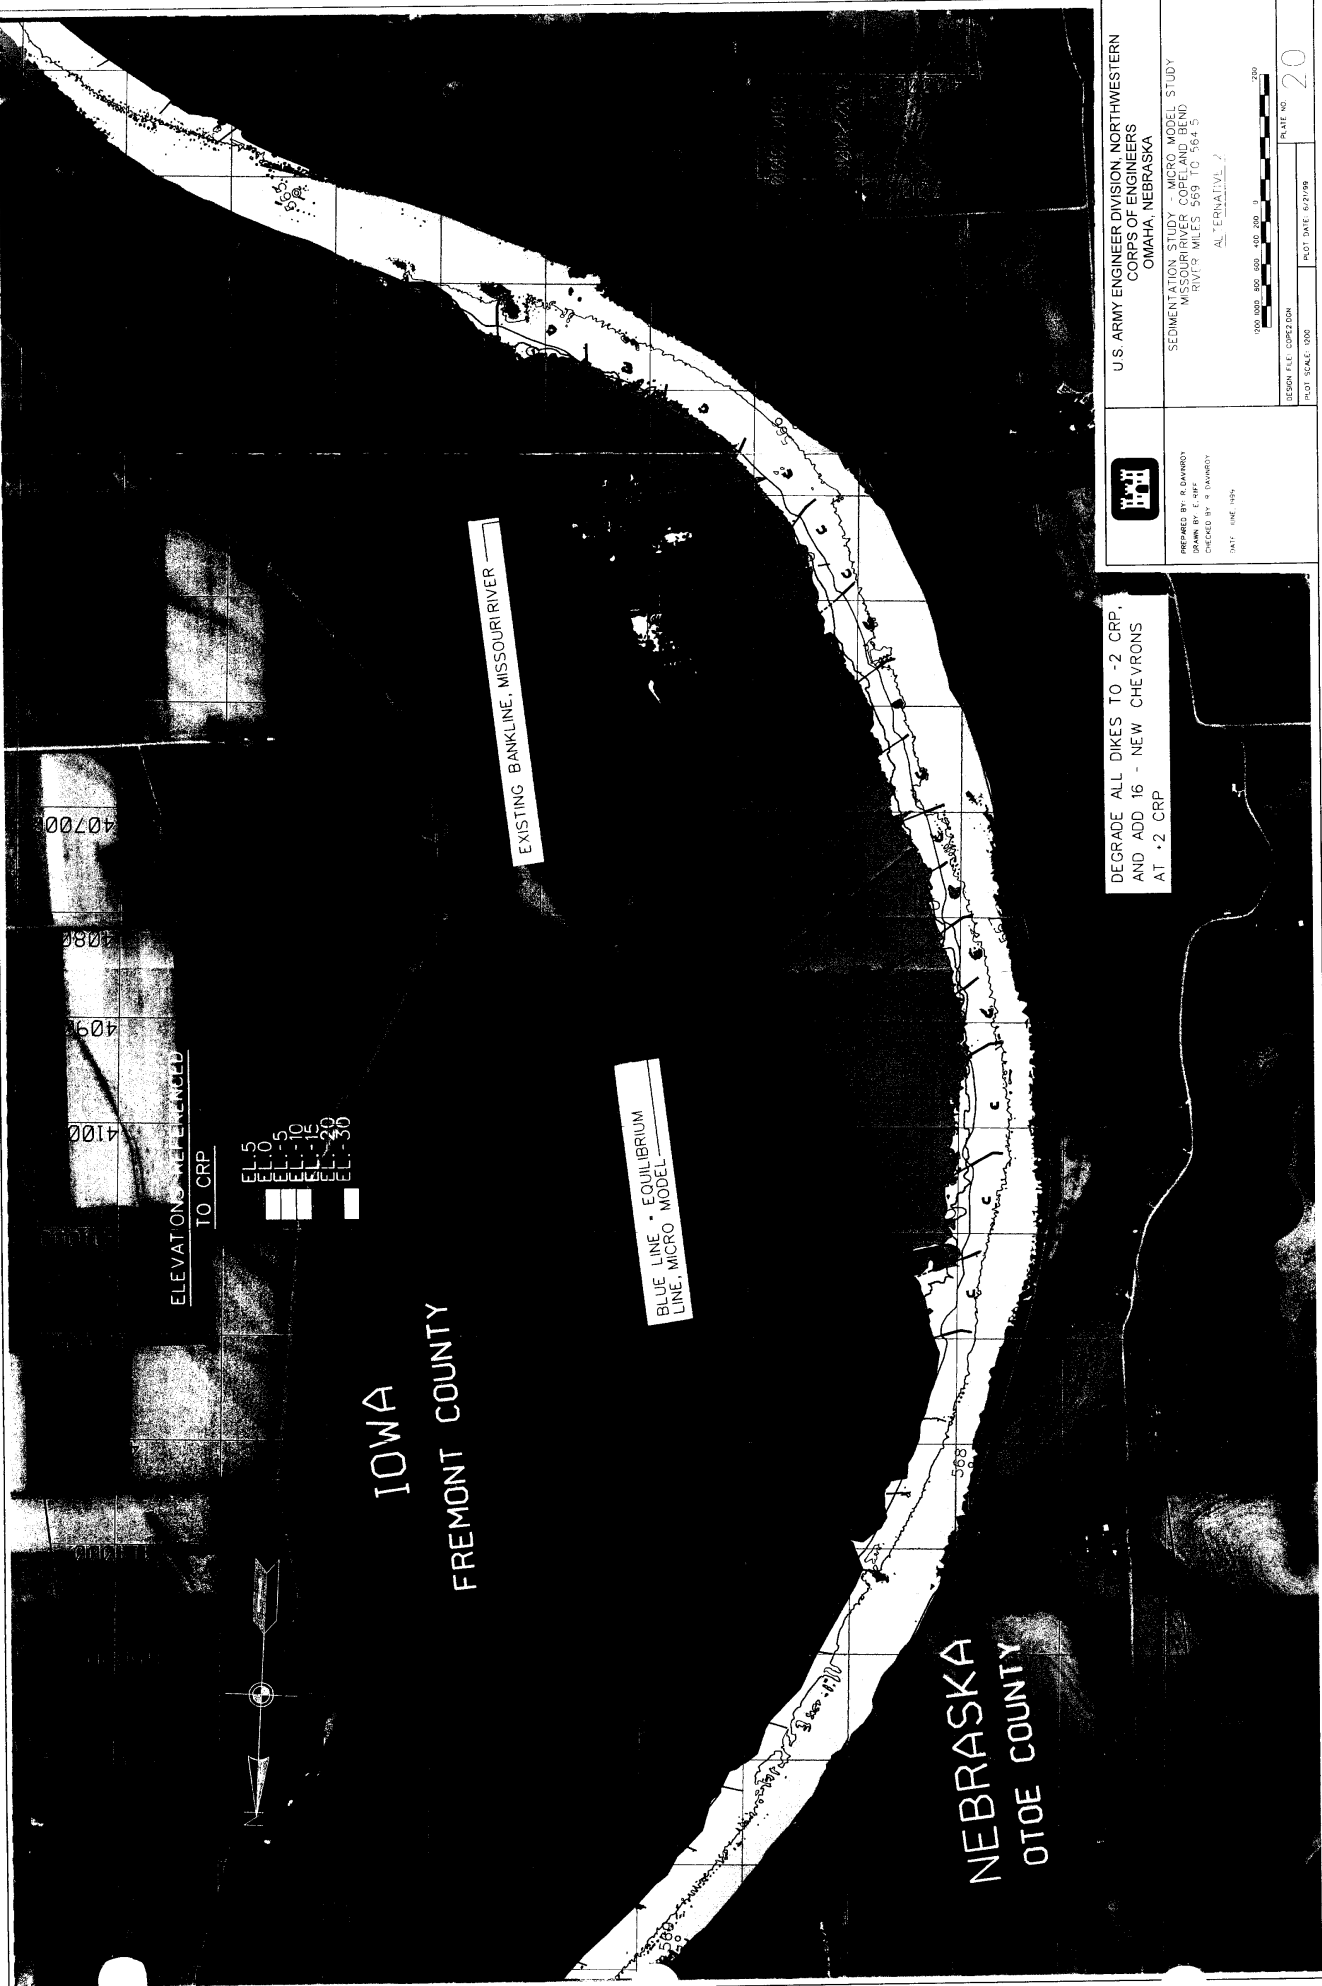


DEGRADE ALL DIKES TO -2 CRP,
AND ADD 16 - NEW CHEVRONS
AT +2 CRP



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. DAVENPORT
DRAWN BY: E. HARRIS
CHECKED BY: A. DAVENPORT
DATE: JUNE 1974


SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 2



PLANT NO. 20

DESIGN FILE: CORP/ENR
PLOT SCALE: 1000
PLOT DATE: 8/7/74



	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA
PREPARED BY: J. Gentry CHECKED BY: D. Gordon DATE: FEBRUARY 1991	Sedimentation Study, Missouri River Copeiland Bend, Flow Visualization Alternative 2 Degrade All Dikes to -2 CRP, Chevrons at +2 CRP
PLATE NO. 22	

ELEVATIONS REFERENCED

TO CRP

EL. 5
EL. 0
EL. -5
EL. -10
EL. -15
EL. -20
EL. -30

IOWA
FREMONT COUNTY

EXISTING BANKLINE, MISSOURI RIVER

BLUE LINE - EQUILIBRIUM
LINE, MICRO MODEL

NEBRASKA
OTOE COUNTY

DEGRADE ALTERNATING DIKES TO -2 CRP



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. DANNY
DRAWN BY: E. BRY
CHECKED BY: S. DANNY
DATE: FEBRUARY 1998

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 1

0 100 200 300 400 500 600 700 800 900 1000

DESIGN FILE: CORPUSION

PLOT SCALE: 1000

PLOT DATE: X

PLATE NO

23



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. DAWBNEY
DRAWN BY: E. WITT
CHECKED BY: R. DAWBNEY
DATE: JUNE 1959

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 3 DIFFERENCE MAP



DESIGN FILE DR 1304
PLOT SCALE: 100'

PLOT DATE: 8/25/58

PLATE NO.
24



PREPARED BY: A. D. Dwyer
CHECKED BY: D. S. Smith

DATE: 10/10/94

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

Sedimentation Study, Missouri River
Copeland Bend, Flow Visualization
Alternative 3





Degrade Alternating Dikes to -2 CRP

PLATE NO

25



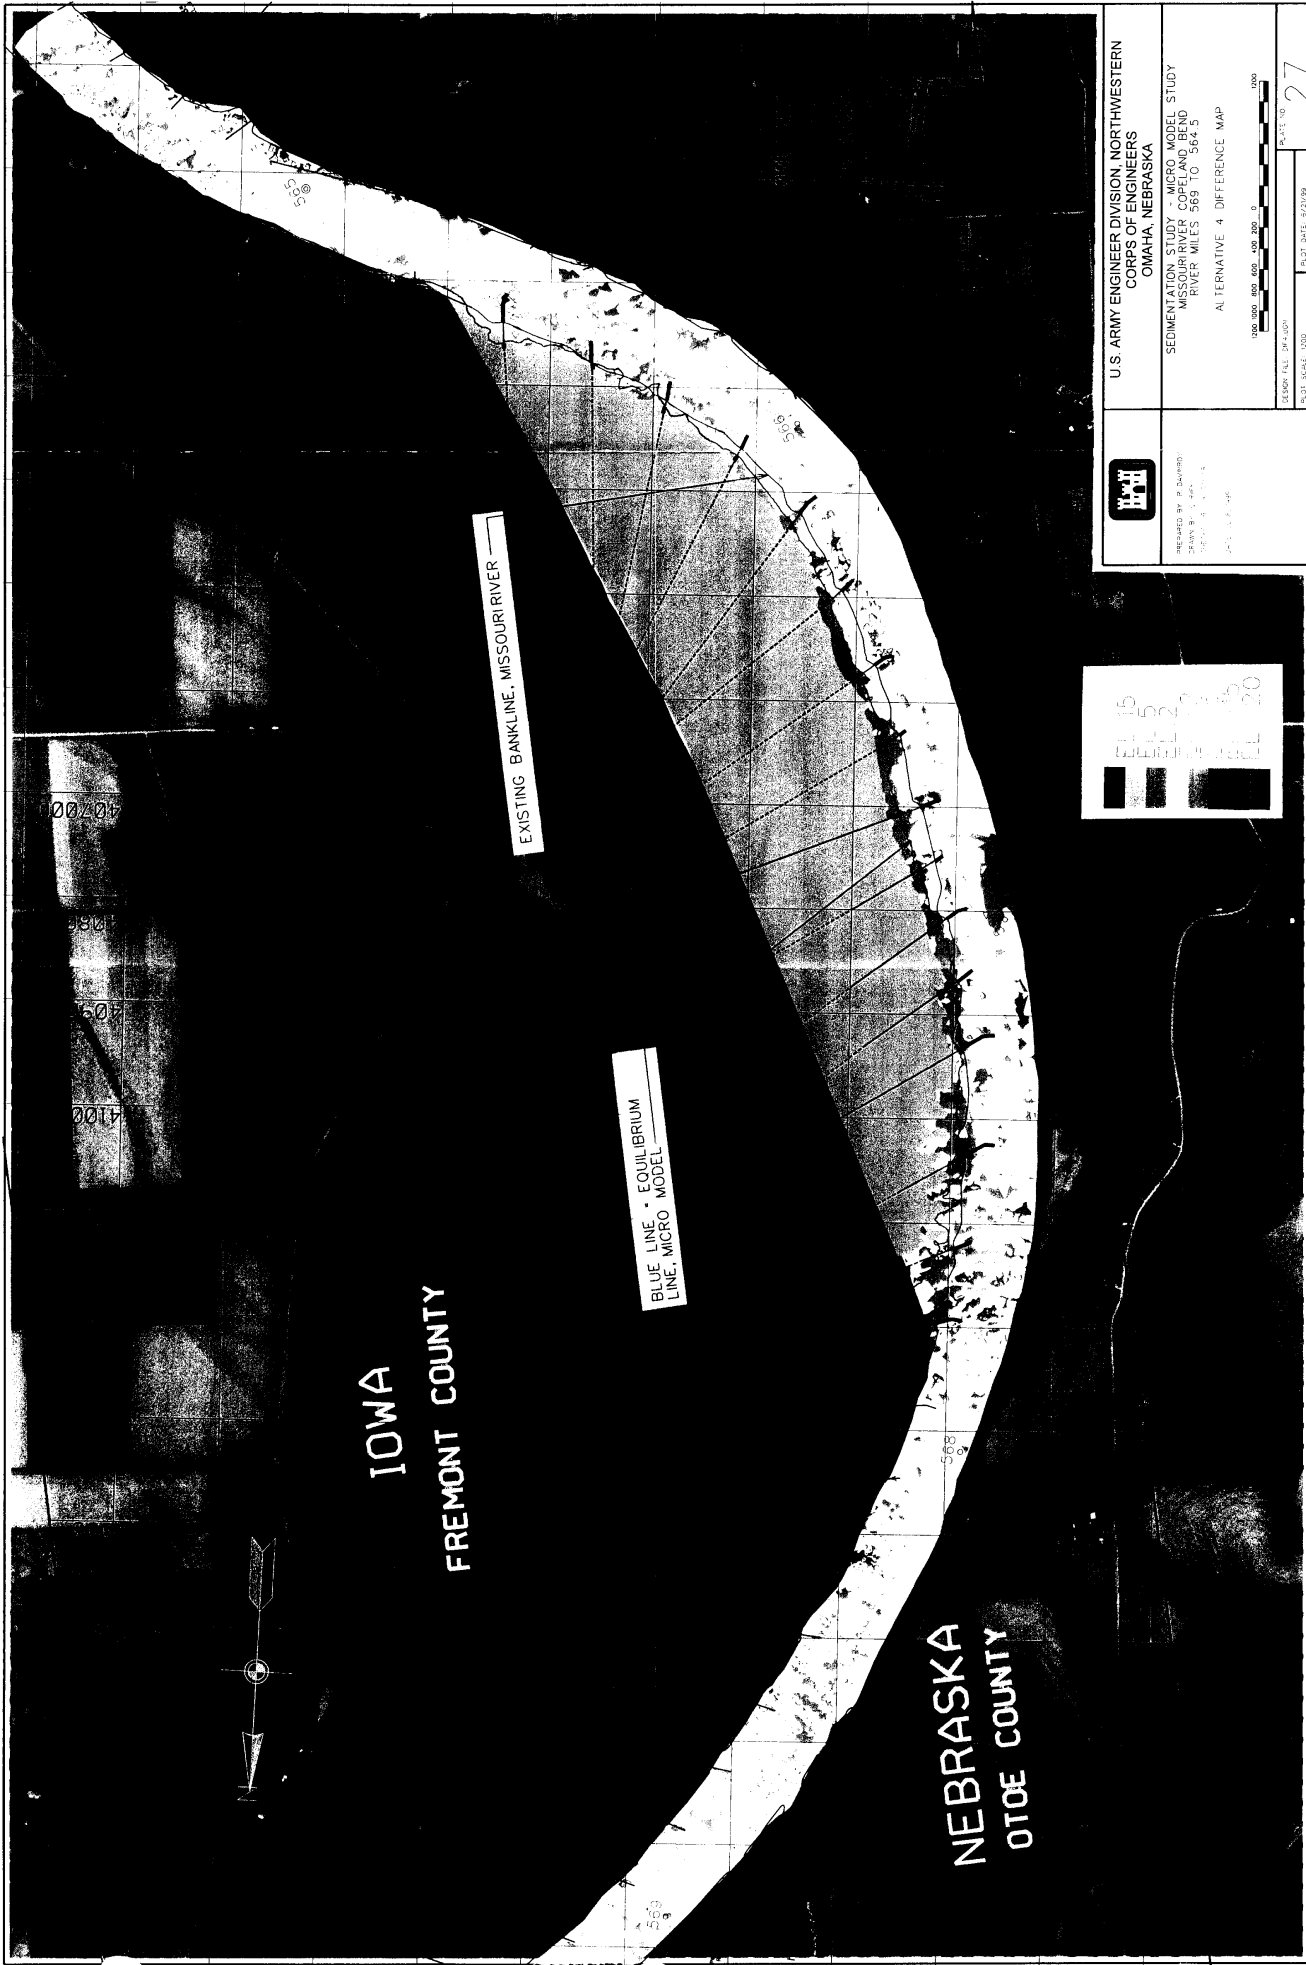

	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA
	SEDIMENTATION STUDY - MICRO MODEL STUDY MISSOURI RIVER COPELAND BEND RIVER MILES 569 TO 564.5 ALTERNATIVE 4 DIFFERENCE MAP

1000 800 600 400 200 0
1:25,000 (NAD 83) 1:25,000 (NAD 83)
SHEET NO. 27
SHEET DATE 12/2/99



PREPARED BY: S. D. Dwyer
CHECKED BY: C. Dwyer

DATE: FEBRUARY 1989

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

Sedimentation Study, Missouri River
Copeland Bend, Flow Visualization
Alternative 4


0 100 200

Degrade Alternating Dikes to -2 CRP. Chevrons at +2 CRP

PLATE NO.

28




	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA	
	SEDIMENTATION STUDY - MICRO MODEL STUDY MISSOURI RIVER COPELAND BEND RIVER MILES 565 TO 564.5 ALTERNATIVE 5	
DESIGNED BY: S. DAWSON DRAWN BY: S. DAWSON CHECKED BY: S. DAWSON DATE: FEBRUARY 1999	DESIGN FILE: CORP. 50A NOT SCALE: 1000	PLATE NO. 29

IOWA
FREMONT COUNTY

NEBRASKA
OTOE COUNTY

EXISTING BANKLINE, MISSOURI RIVER


BLUE LINE - EQUILIBRIUM
LINE, MICRO MODEL



PREPARED BY: R. DAVENPORT
ENGINEER, DISTRICT 1
CIVIL ENGINEER
DATE: 10/1/78


U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 5 DIFFERENCE MAP



PROJECT NO. 30
POST DATE: 10/1/78



	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA
PREPARED BY: R. D. Dwyer CHECKED BY: D. Dwyer DATE: FEBRUARY, 1958	Sedimentation Study, Missouri River Copeland Bend, Flow Visualization Alternative 5 50' Landward Notch at -5 CRP
PLATE NO. 31	



50' LANDWARD NOTCH @ -5 CRP
WITH 16 - NEW CHEVRONS @ +2 CRP



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

DESIGNED BY: S. DANIELS
DRAWN BY: J. B. B. B.
CHECKED BY: S. DANIELS
DATE: FEBRUARY 1999

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER COPELAND BEND
RIVER MILES 585 TO 564.5
ALTERNATIVE 6




DESIGN FILE: CORPES-004
PLOT SCALE: 1:500


PLOT DATE: 8

PLATE NO.

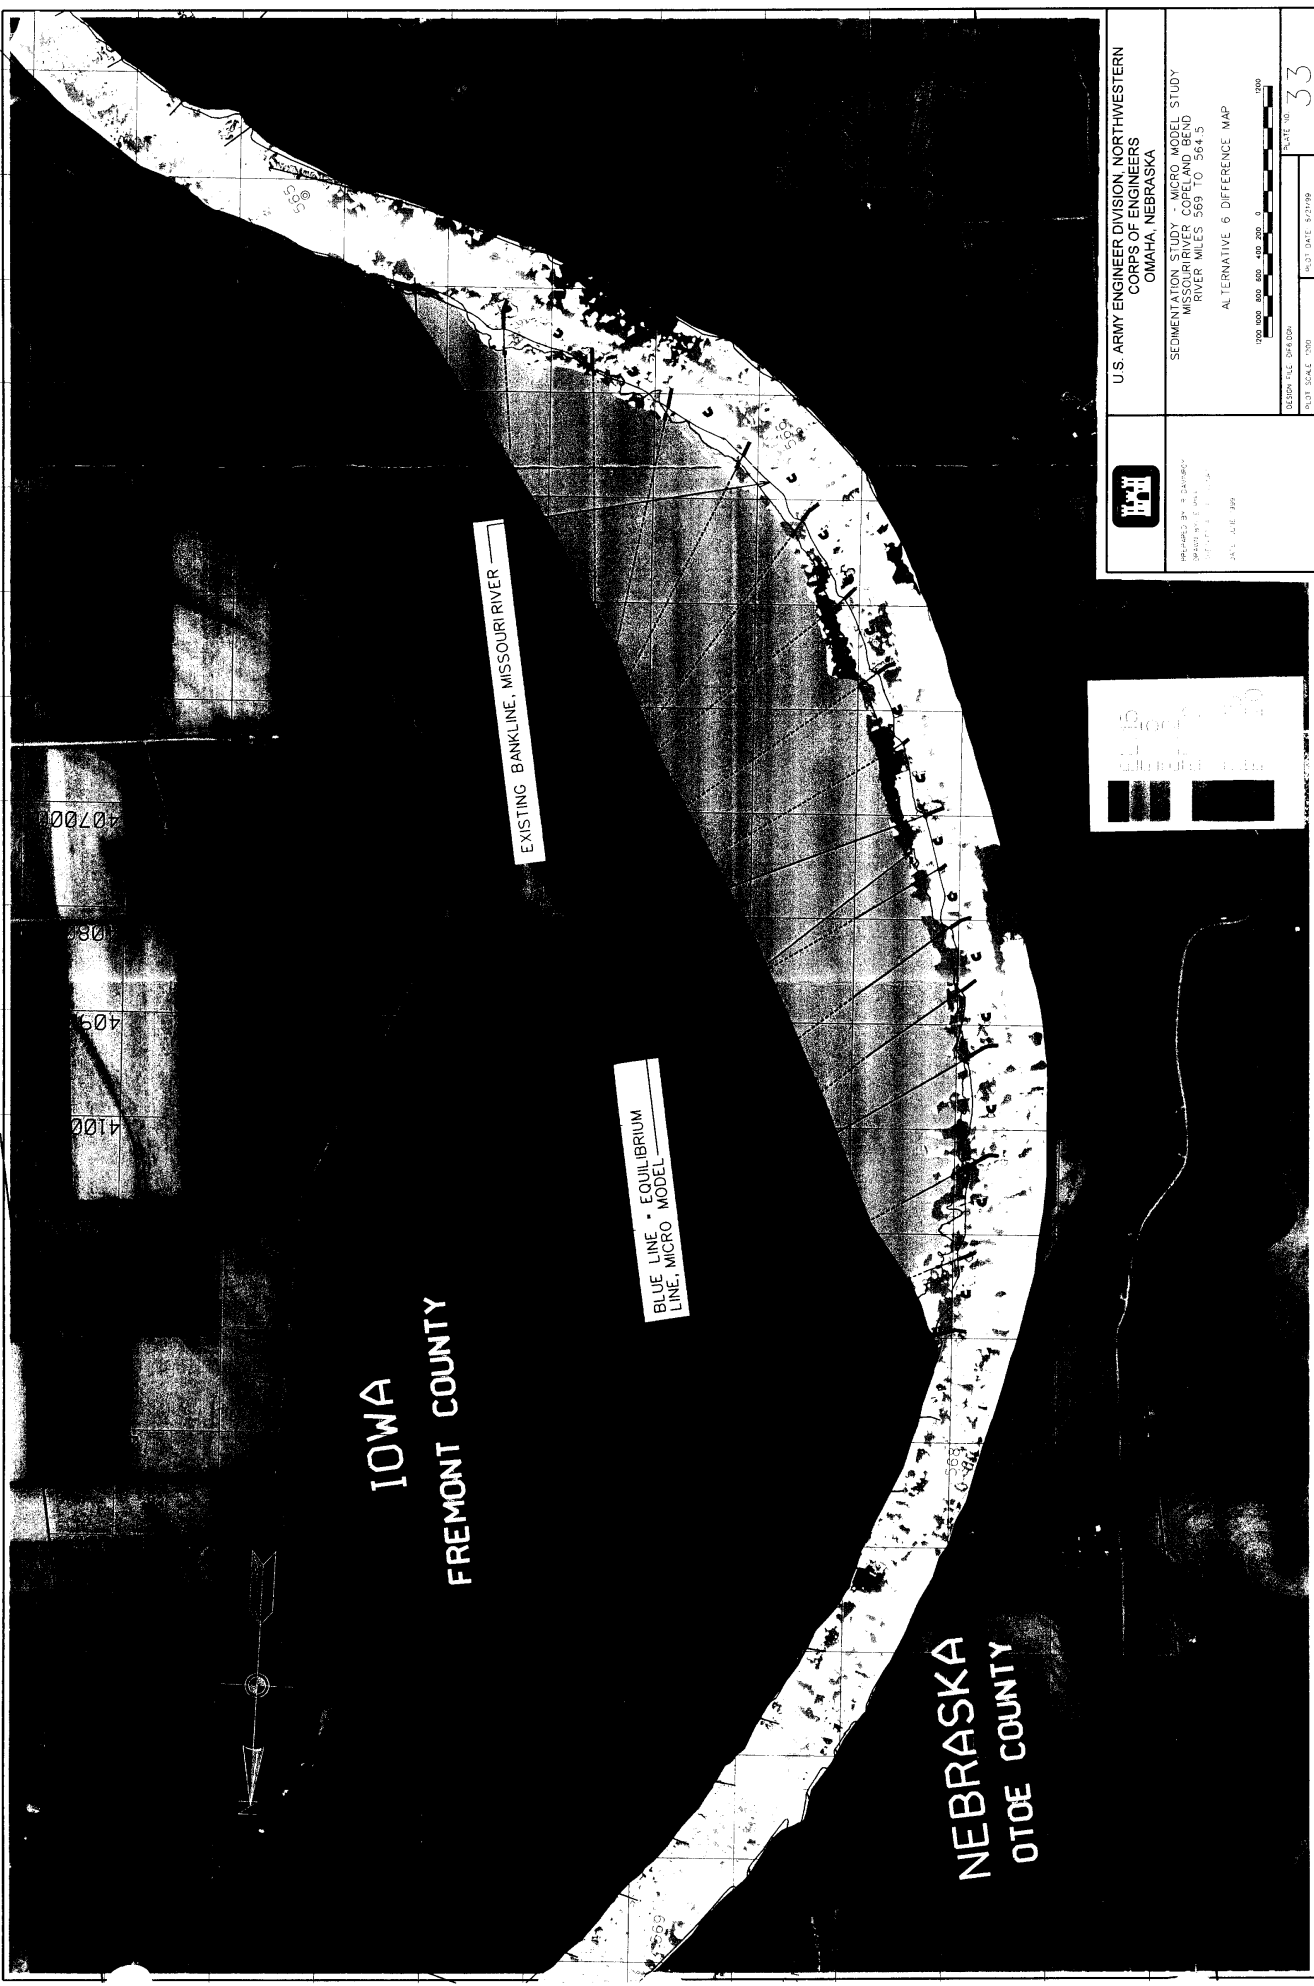

32



	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA
	SEDIMENTATION STUDY - MICRO MODEL STUDY MISSOURI RIVER, SUGELAND BEND RIVER MILES 563 TO 584.5 ALTERNATIVE 6 DIFFERENCE MAP
DESIGN FILE 044-034 SCALE 1:50,000 DATE 8/7/99 SHEET NO. 33	





	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA	
	Sedimentation Study, Missouri River Copeland Bend, Flow Visualization Alternative 6	
PREPARED BY: R. D. Owens CHECKED BY: D. Gordon DATE: FEBRUARY 1988	 Landward Notch, -5 CRP, Chevrons at +2 CRP	PLATE NO. 34



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: S. DANFORD
DRAWN BY: E. DANFORD
CHECKED BY: R. DANFORD
DATE: FEBRUARY, 1999

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER
RIVER MILES 500 TO 504.5
ALTERNATIVE 7


1000 1000 800 600 400 200 0

DESIGN FILE: CRP7.50M


PLOT SCALE: 1000

PLATE NO.

35

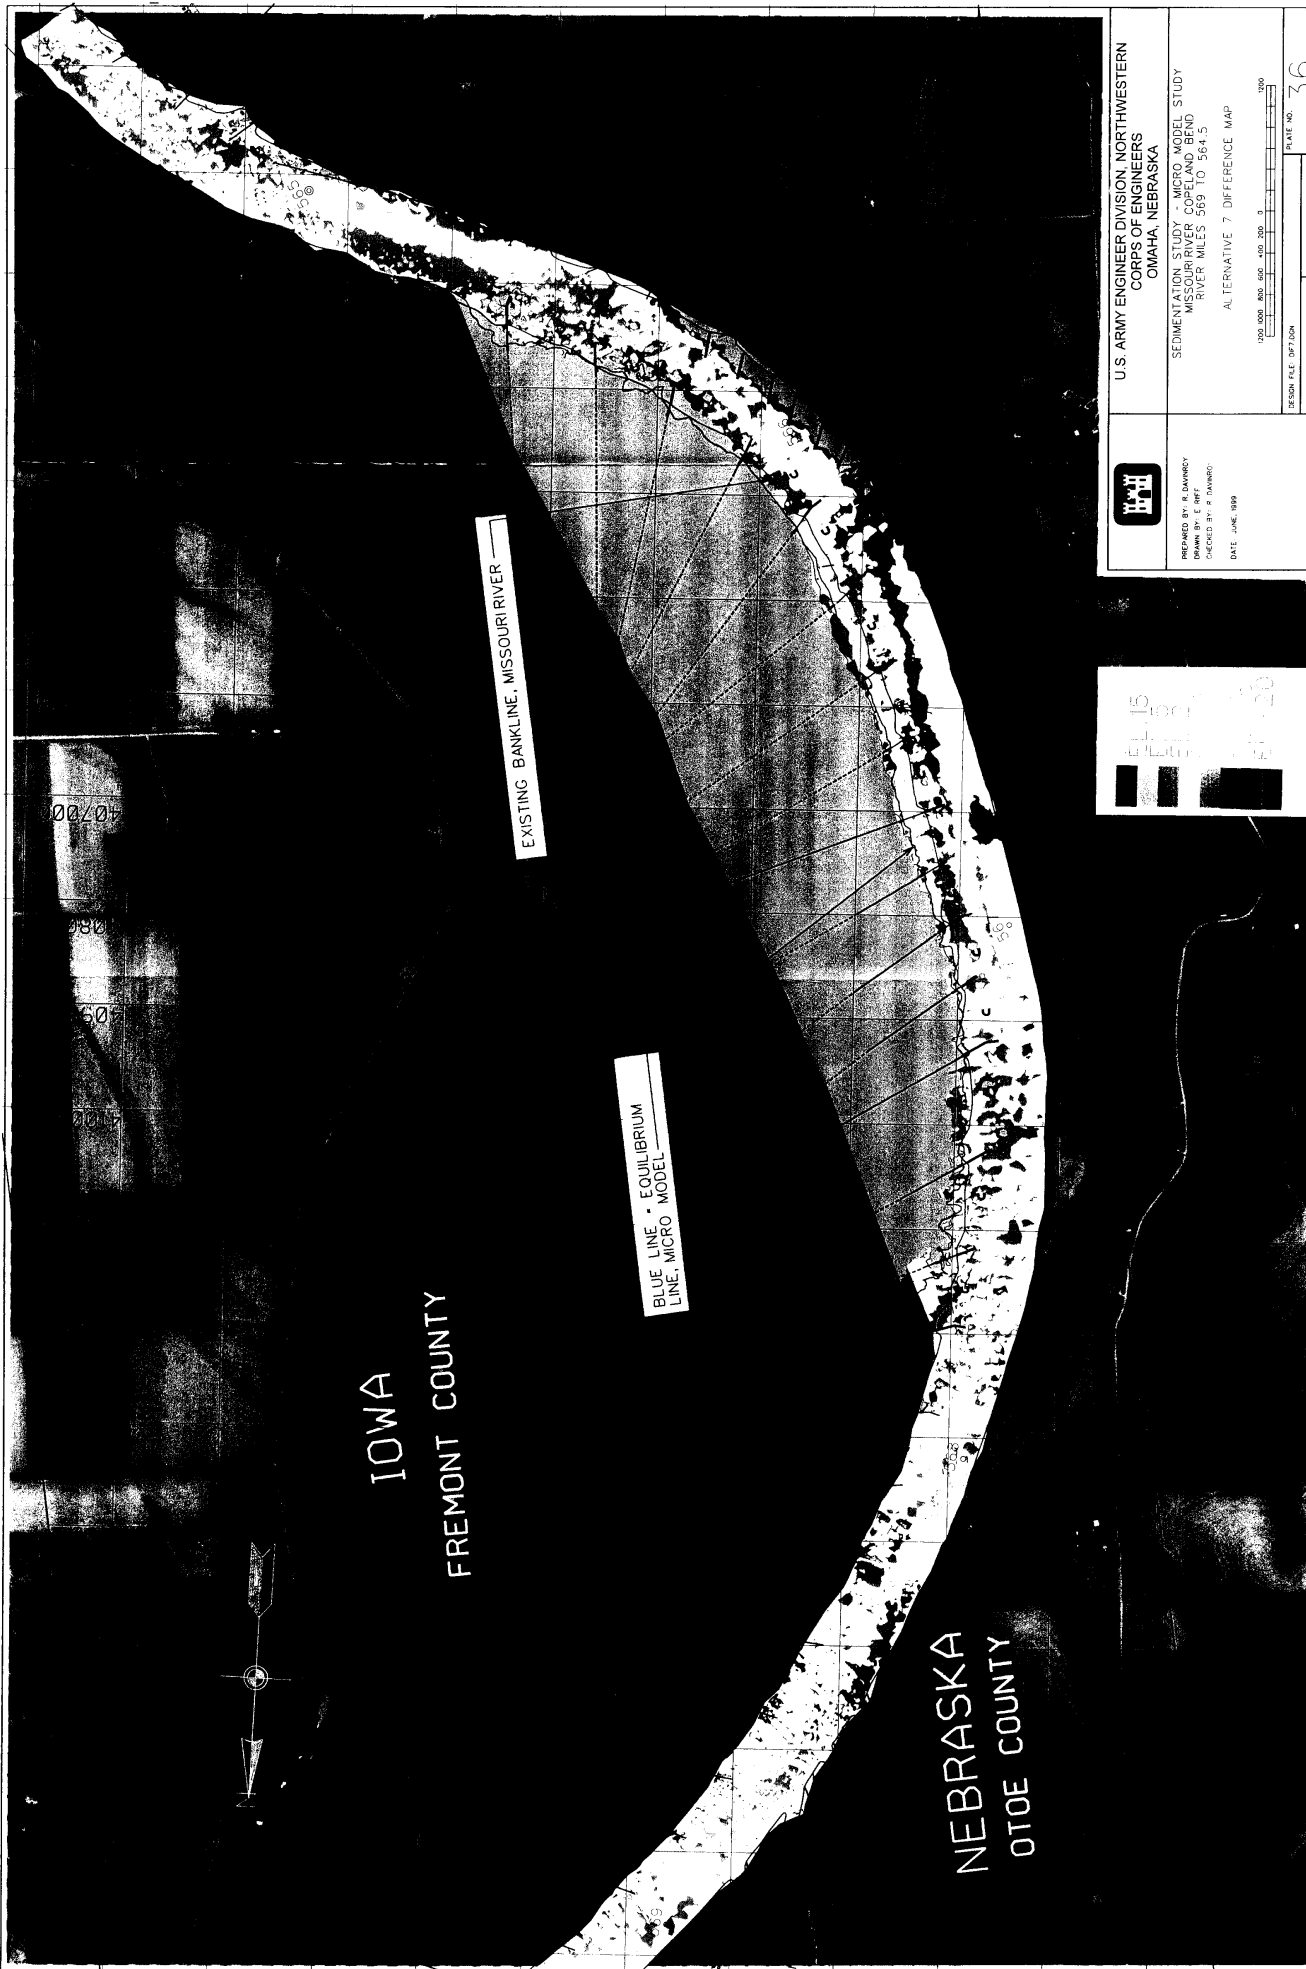

PREPARED BY: R. DAVENCO
DRAWN BY: E. RIFT
CHECKED BY: R. DAVENCO
DATE: JUNE 1998



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 7 DIFFERENCE MAP






PLATE NO. 36



	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA	
	Sedimentation Study, Missouri River Copeland Bend, Flow Visualization Alternative 7	
PREPARED BY: R. D. Dwyer CHECKED BY: J. Dwyer DATE: 11/20/89	Bentway Weirs, -15 CRP With Alternative 2	
DATE NO.		37

ELEVATIONS REFERENCED
TO CRP



IOWA
FREMONT COUNTY

EXISTING BANKLINE, MISSOURI RIVER

BLUE LINE - EQUILIBRIUM
LINE, MICRO MODEL

NEBRASKA
OTOE COUNTY

BANKLINE DEGRADATION TEST WITH DIKES



U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

PREPARED BY: R. DAWSON
CHECKED BY: E. REPP
DESIGNED BY: R. DAWSON
DATE: JUNE, 1998

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 8




DESIGN FILE: CPELSDM
PLOT SCALE: 1000

PLATE NO. 38





	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA
PREPARED BY: R. Conway CHECKED BY: D. DeWitt LW-10 - FEBRUARY, 1992	Sedimentation Study, Missouri River Copeland Bend, Flow Visualization Alternative 8 3 100 Bankline Degradation Test with Dikes in Place
DATE NO 40	



ELEVATIONS REFERENCED
TO CRP

EL. 5
EL. 10
EL. 15
EL. 20
EL. 30

IOWA
FREMONT COUNTY

EXISTING BANKLINE, MISSOURI RIVER

BLUE LINE - EQUILIBRIUM
LINE, MICRO MODEL

NEBRASKA
OTOE COUNTY

DIKES REMOVED @ BANKLINE NEAR EQUILIBRIUM



PREPARED BY: R. SAWYER
DRAWN BY: E. BERT
CHECKED BY: R. SAWYER
DATE: FEBRUARY 1989

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 9


0 100 200 300 400 500 600 700 800 900 1000

DESIGN FILE: C0000000

PLOT SCALE: 1" = 100'

DATE: 11/89

41

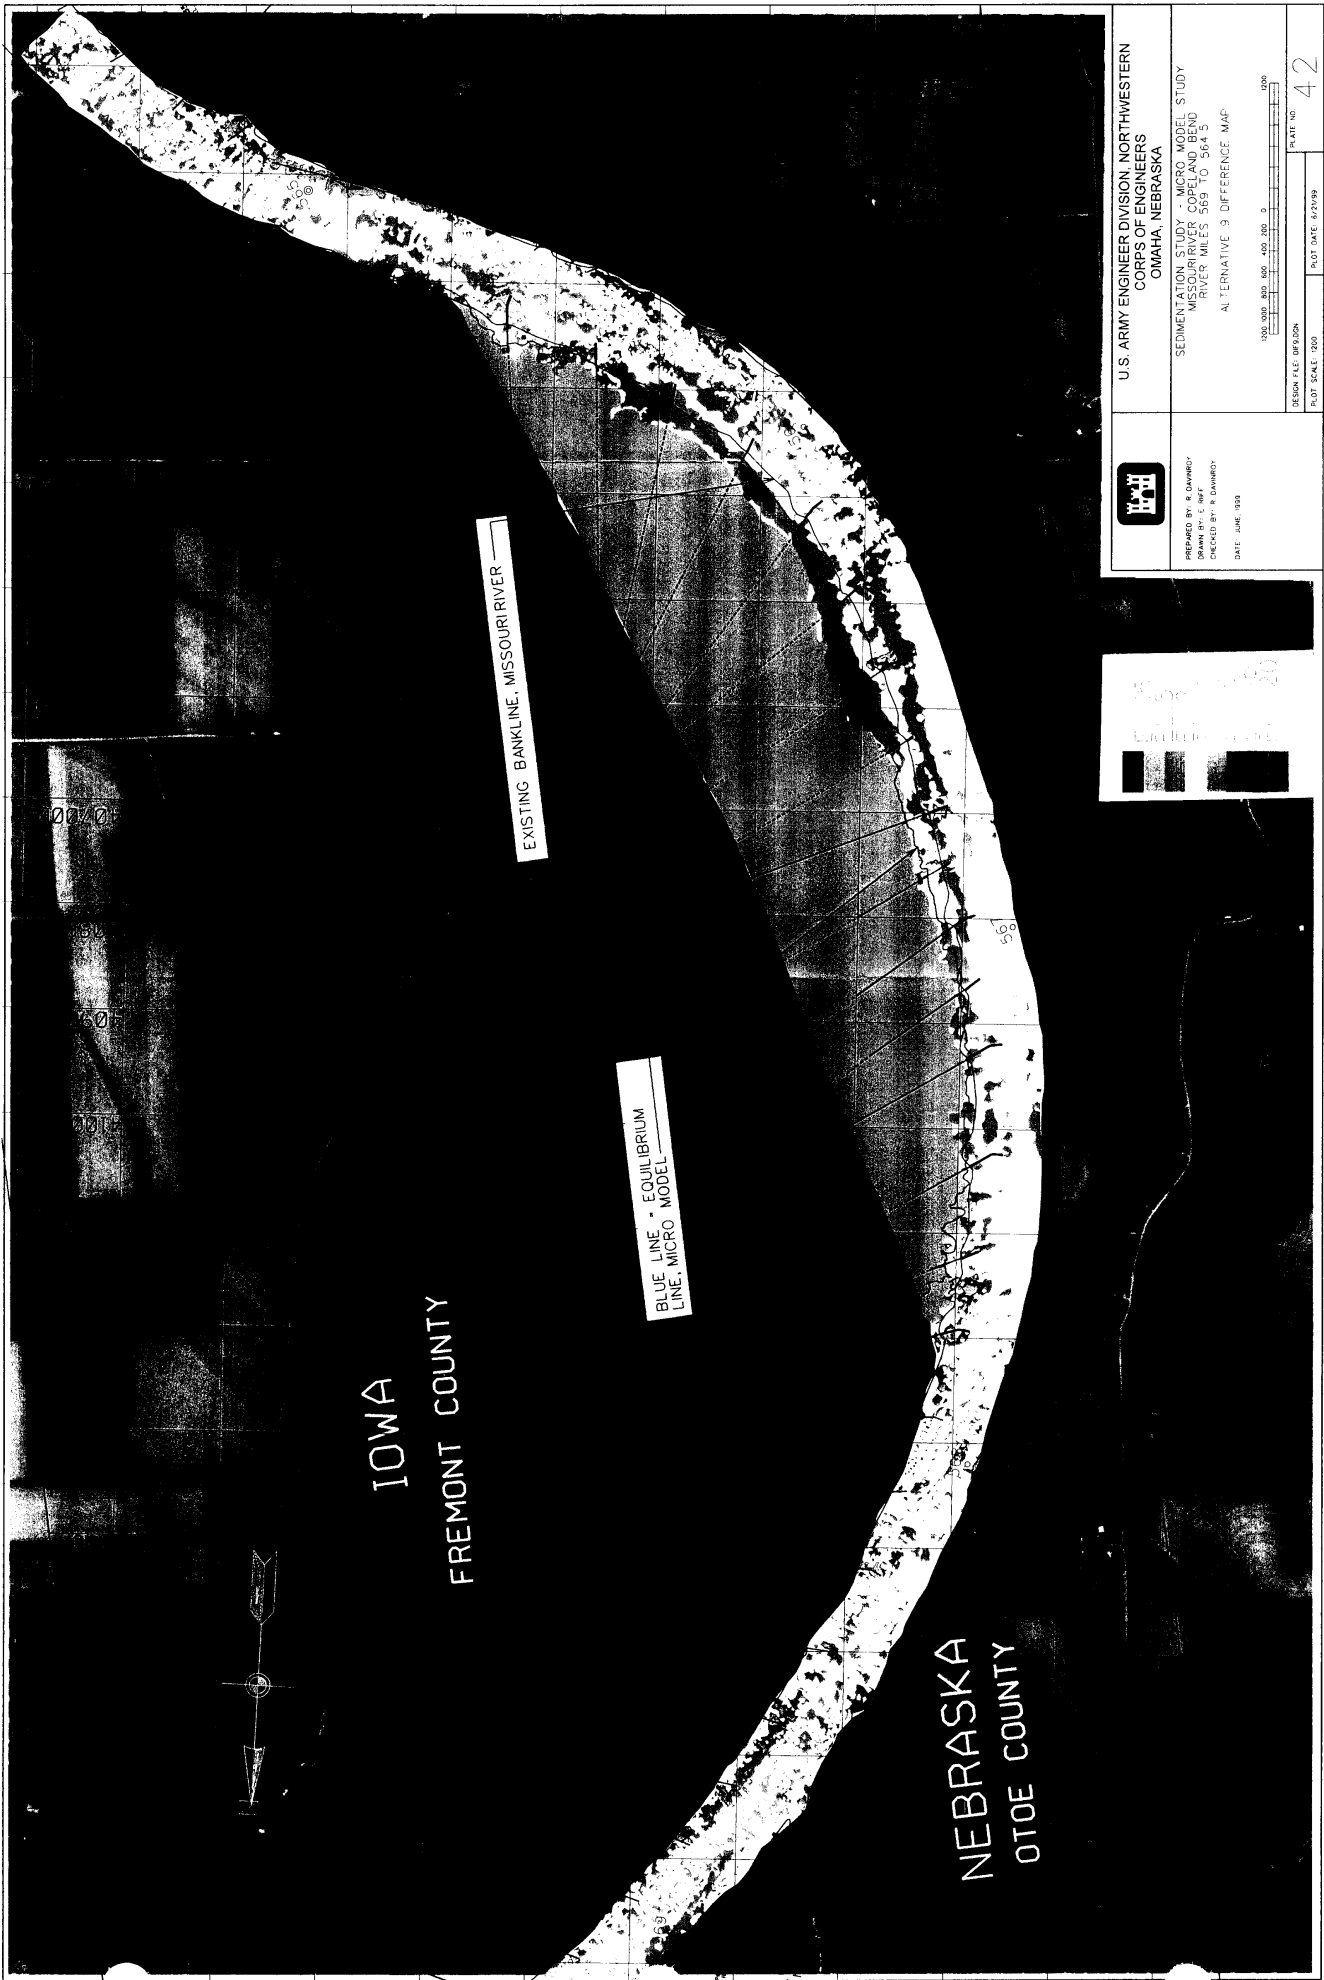

PREPARED BY: R. DAVENPORT
DRAWN BY: E. REEF
CHECKED BY: R. DAVENPORT
DATE: JUNE 1958

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

SEDIMENTATION STUDY - MISSOURI MODEL STUDY
MISSOURI RIVER, COPELAND BEND
RIVER MILES 569 TO 564.5
ALTERNATIVE 9 DIFFERENCE MAP

1000 900 800 700 600 500 400 300 200 100 0


DESIGN FILE: D-1550N

PLOT SCALE: 1"=100'

PLAT NO.

42

ELEVATIONS REFERENCED
TO CRP



IOWA
FREMONT COUNTY

BLUE LINE - EQUILIBRIUM
LINE, MICRO MODEL

EXISTING BANKLINE, MISSOURI RIVER

NEBRASKA
OTOE COUNTY

BANKLINE DEGRADATION TEST
WITH DIKES REMOVED



PREPARED BY: E. J. JAWORSKY
DRAWN BY: E. J. JAWORSKY
CHECKED BY: E. J. JAWORSKY
DATE: FEBRUARY 1989

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER COPLAND BEND
RIVER MILES 569 TO 584.5
ALTERNATIVE 10




DESIGN FILE: C07E0304

PLATE NO.

PLOT DATE: *

PLOT SCALE: 1000

43

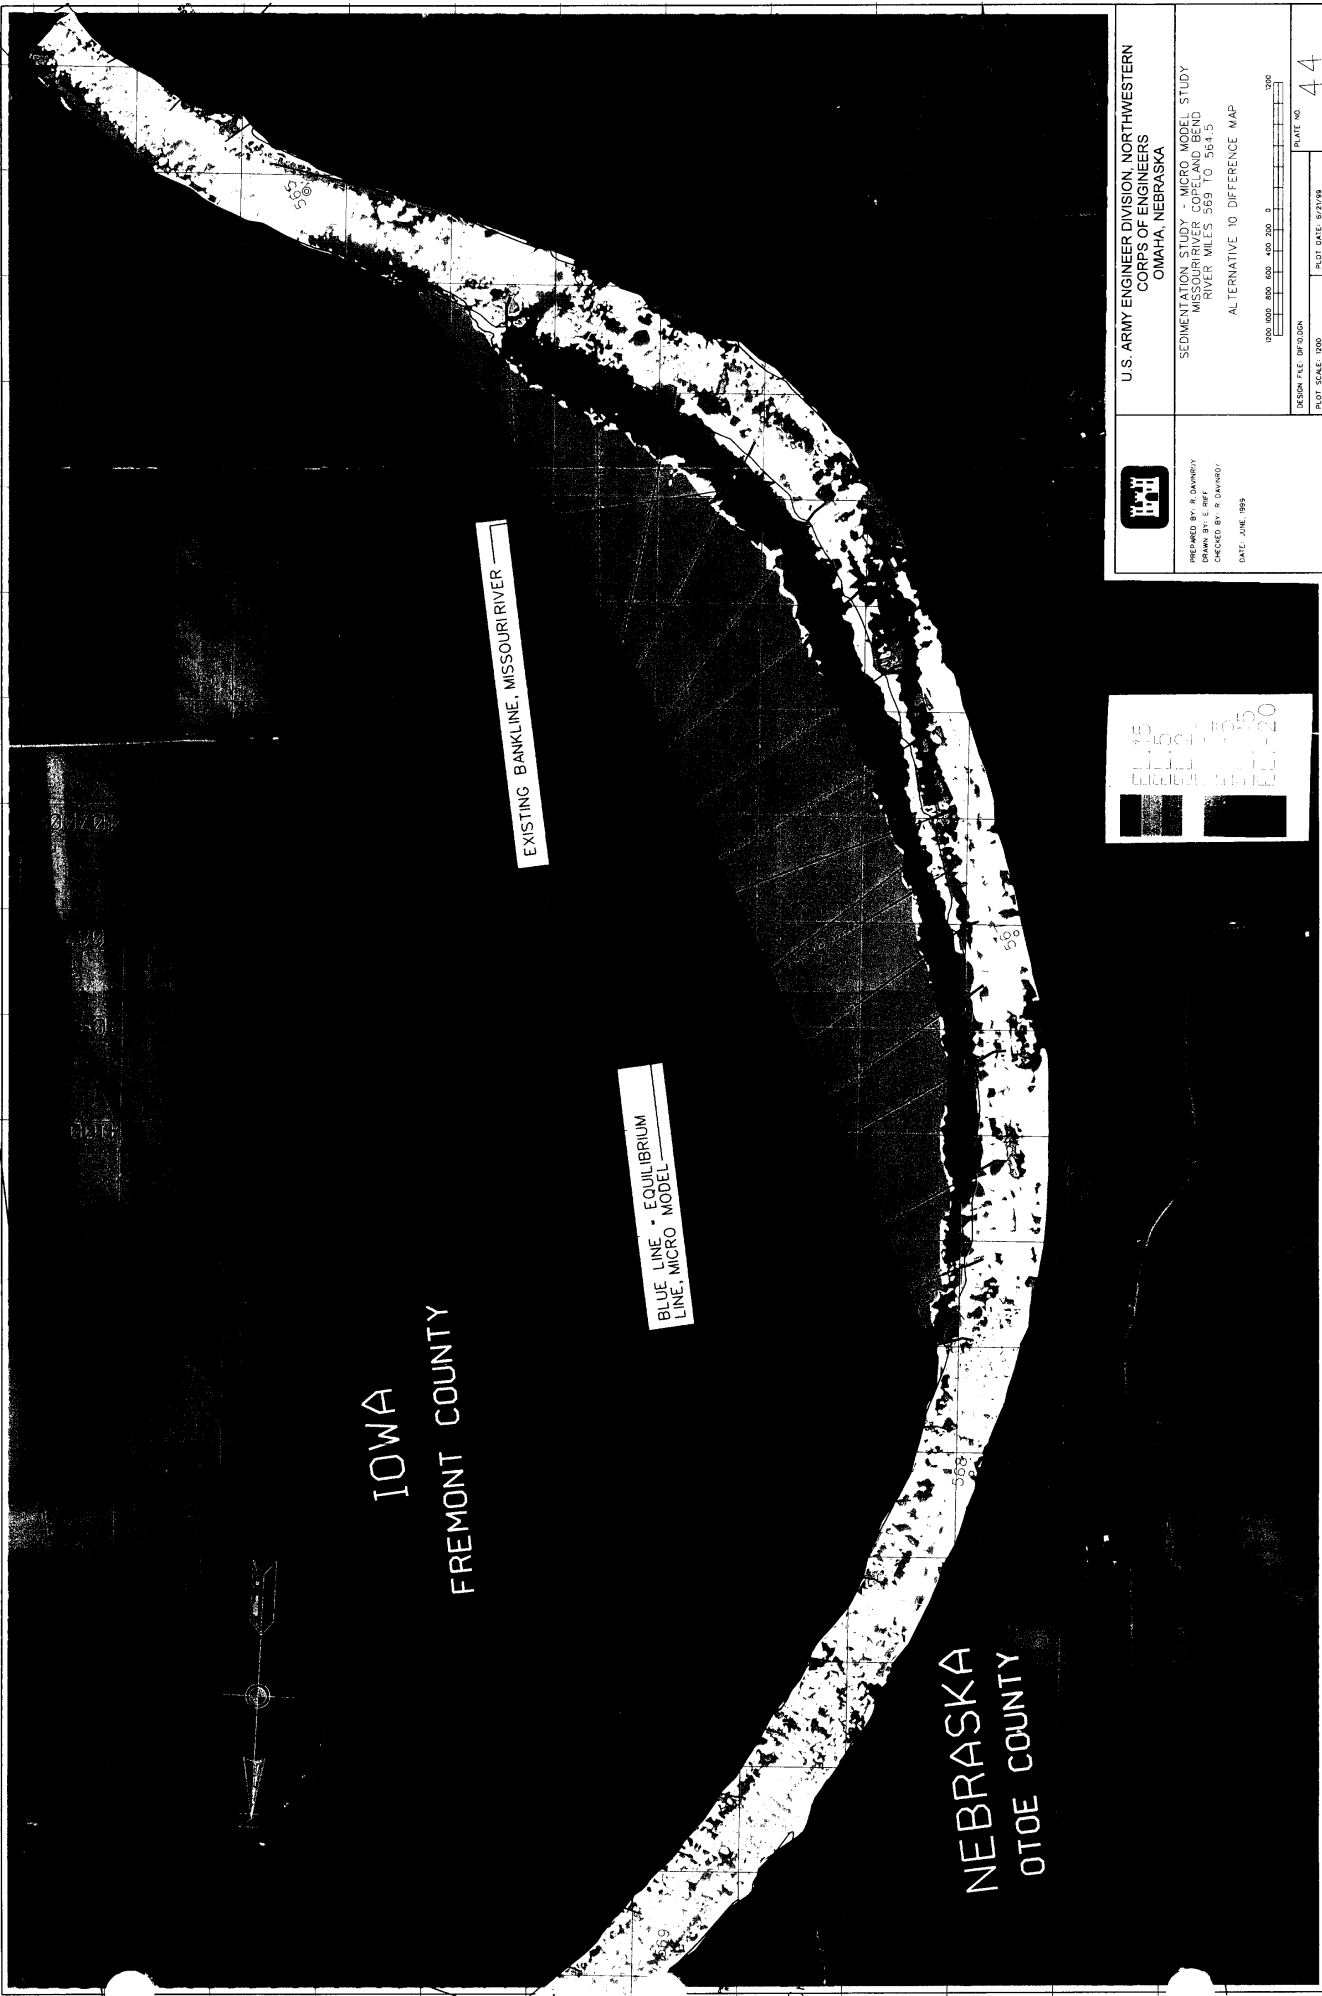

U.S. ARMY ENGINEER DIVISION, NORTHWESTERN
CORPS OF ENGINEERS
OMAHA, NEBRASKA

DESIGNED BY: R. DAVENPORT
DRAWN BY: S. RIFT
CHECKED BY: R. DAVENPORT
DATE: JUNE 1994

SEDIMENTATION STUDY - MICRO MODEL STUDY
MISSOURI RIVER COPELAND BEND
RIVER MILES 565 TO 564.5
ALTERNATIVE 10 DIFFERENCE MAP




DESIGN FILE: 07F030A


PLATE NO.

44

PLOT DATE: 8/24/98





	U.S. ARMY ENGINEER DIVISION, NORTHWESTERN CORPS OF ENGINEERS OMAHA, NEBRASKA	
	Sedimentation Study, Missouri River Copeland Bend, Flow Visualization Alternative 10	
PREPARED BY: R. DOWNEY CHECKED BY: D. DAVIS DATE: FEBRUARY, 198	Maximum Contraction Test With Dike Removal SCALE: 1" = 100' P.L. 100'	
		PLATE NO. 45